


Reference Sheet

UltraSlim LED Strip Light

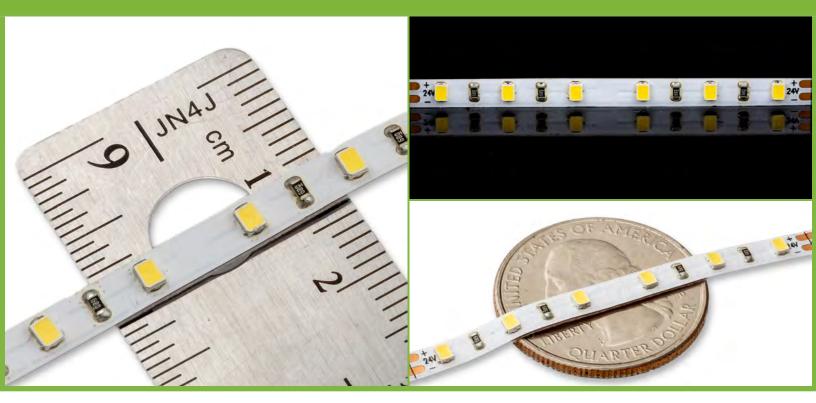

The Thinnest LED Strip Light Available

UltraSlim LED Strip Light is the thinnest LED strip light available in the industry. It is remarkably narrow, at only 3.5mm wide, yet maintains a rugged durability due to its high-quality construction. This is the optimal product for edge lighting glass and acrylic panels with thicknesses down to ¼". Due to its width, this strip is easily concealable and can go where other strip light cannot. Its thin profile makes it great for use in projects that have tight mounting spaces. UltraSlim LED Strip Light is surprisingly bright, with a lumen output of up to 1,039 lumens per meter. This high-density strip light utilizes 120 LEDs per meter and allows for fantastic light diffusion. The 5 meter reels run on 24 VDC and are UL-Listed.

- 3.5mm wide
- 120 LEDs per meter
- Up to 1,039 lumens per meter
- Available in 2,700K to 6,500K
- UL-Listed









UltraSlim LED Strip Light

Specifications

Output	UltraSlim 2016 LED Strip Light - 2,700K	UltraSlim 2016 LED Strip Light - 3,000K	UltraSlim 2016 LED Strip Light - 4,000K	UltraSlim 2016 LED Strip Light - 5,000K	UltraSlim 2016 LED Strip Light - 6,500K
	2700K-2016US-120-3.5-reel	3000K-2016US-120-3.5-reel	4000K-2016US-120-3.5-reel	5000K-2016US-120-3.5-reel	6500K-2016US-120-3.5-reel
Brightness (lm/m)	879	937	1,041	1,039	1,007
Color Rendering Index	94	92	92	94	93
Color temperature	2,700K	3,000K	4,000K	5,000K	6,500K
Electrical					
Voltage (DC)	24	24	24	24	24
Power (W)	52	52	52	52	52
Power (W/m)	10.4	10.4	10.4	10.4	10.4
Efficacy 1 (lm/W)	69	74	81	82	79
Efficacy 2 (mW/W)	253	260	280	295	292
Density (LEDs/m)	120	120	120	120	120
Input Current (mA)	2167	2167	2167	2167	2167
LED Node Size	2016	2016	2016	2016	2016
Dimming Specifications	Fully Dimmable				
Physical					
Length (m)	5	5	5	5	5
Width (mm)	3.5	3.5	3.5	3.5	3.5
Cutting Increment (mm)	50	50	50	50	50
Rating	UL-Listed, RoHS				

