


4-in-1 5050 CurrentControl LED Strip Light

RGBA-4in1-CC5050-60-reel, RGBA-4in1-CC5050-72-reel,
 RGBDW-4in1-CC5050-60-reel, RGBDW-4in1-CC5050-72-reel,
 RGBWW-4in1-CC5050-60-reel, RGBWW-4in1-CC5050-72-reel

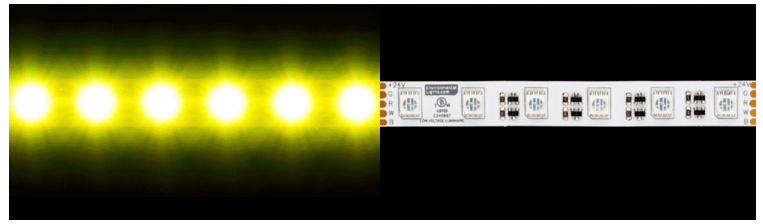

PRODUCT DESCRIPTION

The 4-in-1 LED Strip Light is just that; four LEDs packaged on one node, allowing for tones and hues that were previously impossible to achieve with a single RGB strip. In addition to containing an RGB diode, this strip also features a 6,500K daylight white diode that allows you to create bolder and more vibrant colors than with RGB alone. The expanded color options of 4-in-1 solve the creative challenges of scenic, stage and retail environments.

Ideal Application: One of our best selling product lines for various applications including retail, scenic/stage, exhibit, hospitality, audio visual, architectural & commercial and more!

PRODUCT FEATURES

- Four colors per node
- Seamless blending of RGB and 6500K Daylight White
- DMX controllable
- IP20 rated, also available in IP65 [waterproof]
- 5-meter run lengths
- Easy to install
- UL Listed, RoHs
- Average Lifetime: 50,000 hours
- Warranty: 5 Year Limited

TECHNICAL SPECIFICATIONS

Operating Voltage	12 Volts DC			24 Volts DC		
	Color Detail	RGB + 2700K	RGB + 6500K	Color Detail	RGB + 2700K	RGB + 6500K
Color Detail	RGBA	RGBWW	RGBDW	RGBA	RGBWW	RGBDW
Part Number Detail	RGBA	RGBWW	RGBDW	RGBA	RGBWW	RGBDW
Wave Length	630/520/463/592	630/520/463	630/520/463	630/520/463/592	630/520/463	630/520/463
Power (watts/meter)	20.8 watts/meter	20.8 watts/meter	20.8 watts/meter	18.3 watts/meter	18.3 watts/meter	18.3 watts/meter
Power (watts/ft)	6.2 watts/ft	6.2 watts/ft	6.2 watts/ft	5.5 watts/ft	5.5 watts/ft	5.5 watts/ft
Brightness (lumens/meter)	120/343/74/112 lm/m	132/382/79/334 lm/m	129/386/82/417 lm/m	108/303/65/100 lm/m	100/296/63/261 lm/m	105/311/64/311 lm/m
Brightness (lumens/ft)	37/105/23/34 lm/ft	40/116/24/102 lm/ft	39/118/25/127 lm/ft	33/92/20/30 lm/ft	30/90/19/80 lm/ft	32/95/20/95 lm/ft
Beam Angle	120°	120°	120°	120°	120°	120°
Width	0.47 in (12 mm)	0.47 in (12 mm)	0.47 in (12 mm)	0.47 in (12 mm)	0.47 in (12 mm)	0.47 in (12 mm)
Length	8.20 ft (2.5 m)	8.20 ft (2.5 m)	8.20 ft (2.5 m)	16.40 ft (5 m)	16.40 ft (5 m)	16.40 ft (5 m)
Linkable Up To	8.20 ft (2.5 m)	8.20 ft (2.5 m)	8.20 ft (2.5 m)	16.40 ft (5 m)	16.40 ft (5 m)	16.40 ft (5 m)
Min. Cutting Increment	1.64 in (41.7 mm)	1.64 in (41.7 mm)	1.64 in (41.7 mm)	3.94 in (100 mm)	3.94 in (100 mm)	3.94 in (100 mm)
LED Density	72 LEDs/meter	72 LEDs/meter	72 LEDs/meter	60 LEDs/meter	60 LEDs/meter	60 LEDs/meter
LED Spacing	0.55 in (13.9 mm)	0.55 in (13.9 mm)	0.55 in (13.9 mm)	0.66 in (16.7 mm)	0.66 in (16.7 mm)	0.66 in (16.7 mm)
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20

MECHANICAL SPECIFICATIONS

