


6-in-1 Wall Wash Bars & Wall Wash PARs

6in1-Bar-xLED, 6in1-PAR-xLED

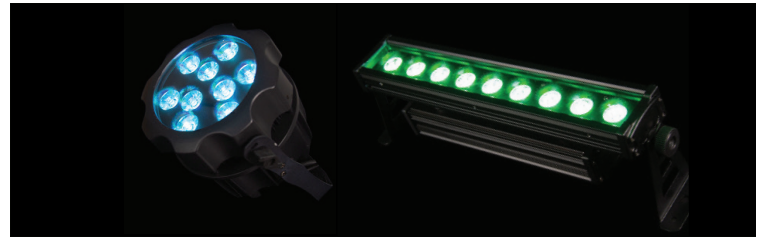

PRODUCT DESCRIPTION

6-in-1 LED Wall Wash Bars and PARs ideal for a variety of indoor and outdoor applications wall wash applications. Illuminate walls and surfaces by mixing red, green, blue and amber with tunable white plus UV. These versatile fixtures can be run in standalone mode or controlled via DMX for fully programmed effects.

INTERFACE

- DMX addressable
- Simple stand-alone programs (static and dynamic)
- Keypad lock-out function (simple two button hold that cannot be changed)
- Keypad lighting turns off after no use

PRODUCT FEATURES


- Seamless blending of Red, Green, Blue, Amber, Tunable White and UV
- DMX controllable
- Suited for outdoor elements (IP65+ and sun exposure)
- High PWM frequency (6 kHz) for on-camera use
- Linkable Power and Data
- Master/Slave Configurations with built-in stand-alone programs (static and dynamic)
- UL-Listed and RoHS certified

SPECIFICATIONS & PARAMETERS


Product Number	6in1-Bar-18LED	6in1-Bar-9LED	6in1-PAR-9LED	6in1-PAR-5LED
Color Temperature	RGBA, 6500K + UV	RGBA, 6500K + UV	RGBA, 6500K + UV	RGBA, 6500K + UV
Input Voltage	100-240 AC	100-240 AC	100-240 AC	100-240 AC
Power (W)	180W	90W	90W	50W
LED Node Size	3030	3030	3030	3030
Length	35.43 in [900 mm]	17.72 in [450 mm]	-	-
Width	2.52 in [64 mm]	2.52 in [64 mm]	8.07 in [205 mm]	9.25 in [235 mm]
Height	7.2 in [183 mm]	7.2 in [183 mm]	8.46 in [215 mm]	6.10 in [155 mm]
Brightness	4180 lm/fixture	1880 lm/fixture	2450 lm/fixture	1260 lm/fixture
Linkable Up To	5 Fixtures	9 Fixtures	9 Fixtures	13 Fixtures
Ambient Working Temp	-40°C to 60°C	-40°C to 60°C	-40°C to 60°C	-40°C to 60°C
IP Rating	IP65	IP65	IP65	IP65

MECHANICAL SPECIFICATIONS


WALL WASH BAR - 18 LEDS

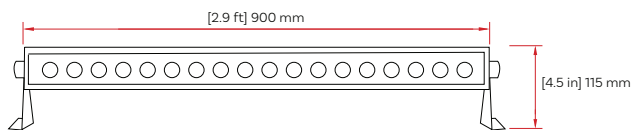

WALL WASH BAR - 9 LEDS

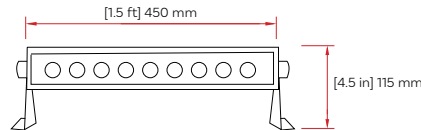

WALL WASH PAR - 9 LEDS

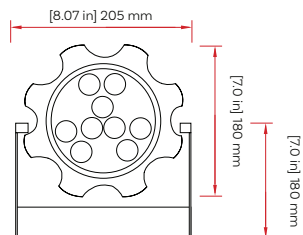

WALL WASH PAR - 5 LEDS

