

HyperFlex LED Strip Light



Award-Winning, Bendable LED Strip Light

HyperFlex LED Strip Light is an astonishingly versatile tape light that gives you the capability to make tight turns on flat surfaces. This strip's circuit board features a unique design that allows it to bend, twist and turn in ways that regular LED strip light cannot. Gradual arcs? Check! Right angles? No problem! HyperFlex virtually eliminates the need to cut and reconnect the strip light when you need to alter the direction of your lighting run. HyperFlex LED Strip can follow the contours of just about any shape, making it the ideal solution for backlighting or illuminating sign letters or logos.

- Makes tight turns on flat surfaces
- 10 meter runs with no noticeable effects of voltage drop
- Brightness comparable to standard LED strip
- Available in 2,400K to 6,500K and single colors
- Fully dimmable
- UL Listed




◀ Dimmable



HyperFlex LED Strip Light

Specifications

Output	HyperFlex 2835 LED Strip Light - 2,400K	HyperFlex 2835 LED Strip Light - 2,700K	HyperFlex 2835 LED Strip Light - 3,000K	HyperFlex 2835 LED Strip Light - 4,000K	HyperFlex 2835 LED Strip Light - 5,000K	HyperFlex 2835 LED Strip Light - 6,500K
	2400K-CC2835HF-60-8-10m	2700K-CC2835HF-60-8-10m	3000K-CC2835HF-60-8-10m	4000K-CC2835HF-60-8-10m	5000K-CC2835HF-60-8-10m	6500K-CC2835HF-60-8-10m
Brightness (lm/m)	584	630	669	674	715	712
Color Rendering Index	90+	90+	90+	90+	90+	90+
Color temperature	2,400K	2,700K	3,000K	4,000K	5,000K	6,500K
Electrical						
Voltage (DC)	24	24	24	24	24	24
Power (W)	70	70	70	70	70	70
Power (W/m)	7	7	7	7	7	7
Efficacy 1 (lm/W)	83	89	95	96	102	101
Density (LEDs/m)	60	60	60	60	60	60
Input Current (mA)	2,920	2,920	2,920	2,920	2,920	2,920
LED Node Size	2835	2835	2835	2835	2835	2835
Dimming Specifications	Fully dimmable	Fully dimmable	Fully dimmable	Fully dimmable	Fully dimmable	Fully dimmable
Physical						
Length (m)	10	10	10	10	10	10
Width (mm)	8	8	8	8	8	8
Cutting Increment (mm)	100	100	100	100	100	100
Warranty	5-year limited	5-year limited	5-year limited	5-year limited	5-year limited	5-year limited
Rating	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS

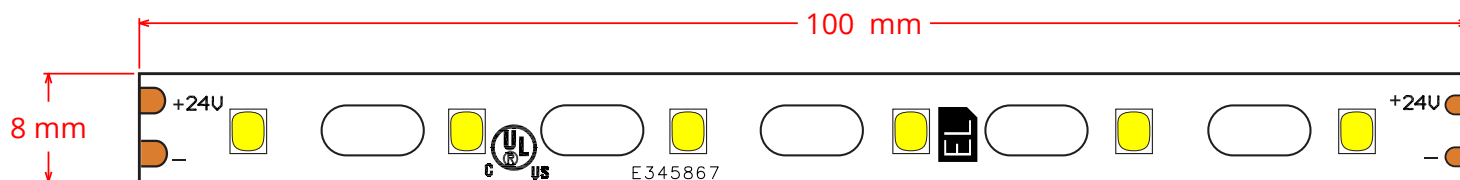

HyperFlex LED Strip Light

Specifications

Output	HyperFlex 2835 LED Strip Light - Red Red-CC2835HF-60-8-10m	HyperFlex 2835 LED Strip Light - Green Green-CC2835HF-60-8-10m	HyperFlex 2835 LED Strip Light - Blue Blue-CC2835HF-60-8-10m	HyperFlex 2835 LED Strip Light - Amber Amber-CC2835HF-60-8-10m
Brightness (lm/m)	145	342	100	281
Wave Length (nm)	628	516	464	632
Electrical				
Voltage (DC)	24	24	24	24
Power (W)	70	70	70	70
Power (W/m)	7	7	7	7
Density (LEDs/m)	60	60	60	60
Input Current (mA)	2,917	2,917	2,917	2,917
LED Node Size	2835	2835	2835	2835
Dimming Specifications	Fully dimmable	Fully dimmable	Fully dimmable	Fully dimmable
Physical				
Length (m)	10	10	10	10
Width (mm)	8	8	8	8
Cutting Increment (mm)	100	100	100	100
Warranty	5 years limited	5 years limited	5 years limited	5 years limited
Rating	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS	UL Listed, RoHS

