


# MICRO-ALU Extrusion

Ref. A01888

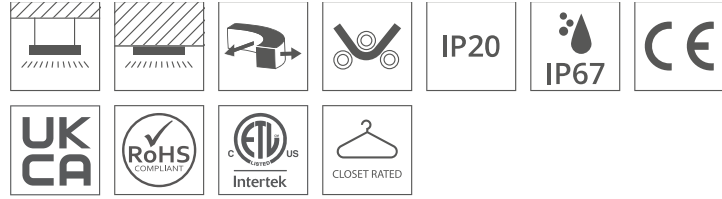

- Wide range of accessories
- Low height
- Smooth extrusion surfaces
- Small bending radius
- Continuous lighting angle adjustment

## APPLICATION

- furniture, decorative and functional lighting


## MOUNTING

- to the surface, suspended or recessed, using dedicated accessories, properly selected screws, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

## ADDITIONAL INFORMATION

- a wide range of accessories that allows various mounting of the lighting fixture in any direction
- standard lengths of KLUŠ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Possible fixture shapes	linear, round
Profile cross-section	rectangular
Width	0.6"
Height	0.2"
LED gluing width A	0.4"
Number of LED strips A (0.31" wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŠ LED strip	24 W/m
Lighting angle adjustment up to	360
Possibility of bending	yes
Radius of the light arc	yes
Inward	150 mm
Outdoor	150 mm
Building type	Commercial, Residential, Hotel / Restaurant, Entertainment/ Arts

Color	Length	Ref
■ silver non anodized	39.4"	A01888N_1
	78.9"	A01888N_2
	118.5"	A01888N_3
■ silver anodized	39.4"	A01888A_1
	78.9"	A01888A_2
	118.5"	A01888A_3
■ black anodized	39.4"	A01888A07_1
	78.9"	A01888A07_2
	118.5"	A01888A07_3
□ white lacquered	39.4"	A01888L10NS_1
	78.9"	A01888L10NS_2
□ white lacquered	39.4"	A01888L10OD_1
	78.9"	A01888L10OD_2
	118.5"	A01888L10OD_3
■ black lacquered	39.4"	A01888L07NS_1
	78.9"	A01888L07NS_2



- Recommended for the construction of sealed lighting fixtures

### APPLICATION

- LED protection and light diffusion in lighting fixtures


### MOUNTING

- to the extrusion, by pressing

### ADDITIONAL INFORMATION

- standard lengths of KLUŠ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŠ

### TECHNICAL DRAWING



### TECHNICAL SPECIFICATIONS


Material	PC
Shape	flat
Maximum length on request	118.1"
Width	0.5"
UV resistance	yes

Finish	Light transmission	Length	Possibility of obtaining a line of light	Ref
frosted	59 %	39.4"	yes	B17208F_1
		78.9"		B17208F_2
		118.5"		B17208F_3
clear	88 %	39.4"	no	B17208C_1
		78.9"		B17208C_2
		118.5"		B17208C_3

# End cap MICRO-ALU

Ref. C20123C02, C20123C10, C20123L01, C20123C07

Ref. arch 1058, 20001, 24062, 24068

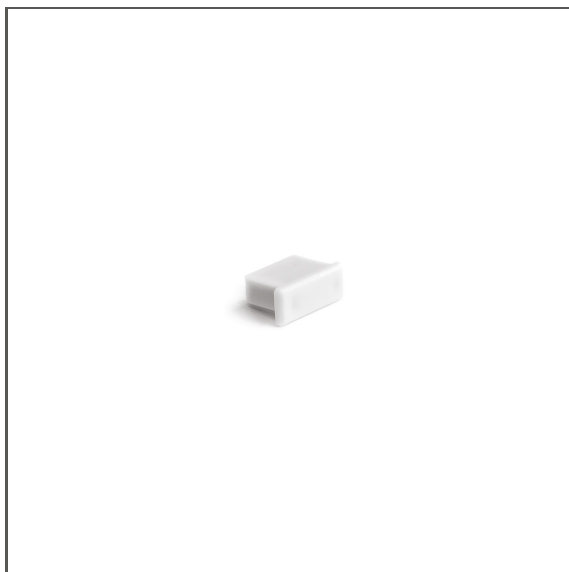

## APPLICATION

- aesthetic finish and protection of the interior of the lighting fixture

## MOUNTING

- to the extrusion, by pressing

## TECHNICAL SPECIFICATIONS

Material	PP
Shape	rectangular
Height	0.24"
Width	0.59"
Corrosion resistance	yes
Corrosion resistance at high salinity	yes

Color	Ref
■ gray	C20123C02 1058
□ white	C20123C10 20001
■ silver	C20123L01 24062
■ black	C20123C07 24068

## RELATED PROFILES > UNIVERSAL



### MICRO-ALU


A01888

Ref. arch B1888

# End cap MICRO-ALU-OTW

Ref. C20123C02TW, C20123C07TW, C20123C10TW

Ref. arch 1060, 24083, 21001

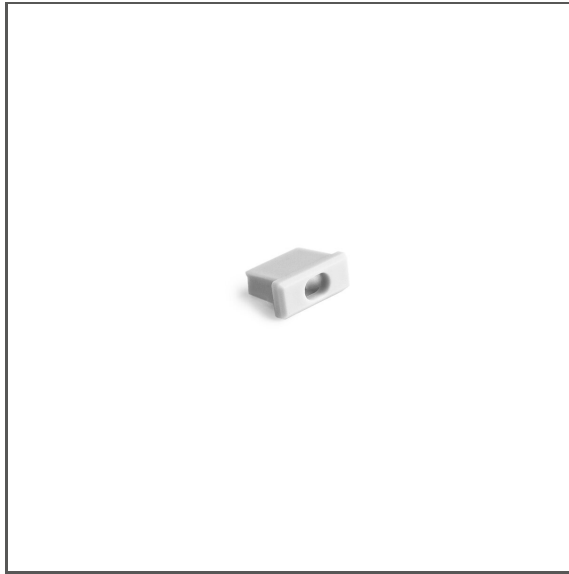

- Cable exit hole

## APPLICATION

- aesthetic finish and protection of the interior of the lighting fixture

## MOUNTING

- to the extrusion, by pressing

## TECHNICAL SPECIFICATIONS

Material	PP
Shape	rectangular
Height	0.24"
Width	0.59"
Corrosion resistance	yes
Corrosion resistance at high salinity	yes
Hole	yes

Color	Ref
■ gray	C20123C02TW 1060
■ black	C20123C07TW 24083
□ white	C20123C10TW 21001

## RELATED PROFILES > UNIVERSAL



### MICRO-ALU

A01888

Ref. arch B1888

# Mounting bracket PDS-STN

Ref. C24190N00

Ref. arch 24190


- High mechanical and weather resistance

## APPLICATION


- for mounting LED lighting fixtures

## MOUNTING

- to the surface, using a properly selected screw
- to the lighting fixture, with hooks
- easy installation and deinstallation of lighting fixtures by snapping in and out

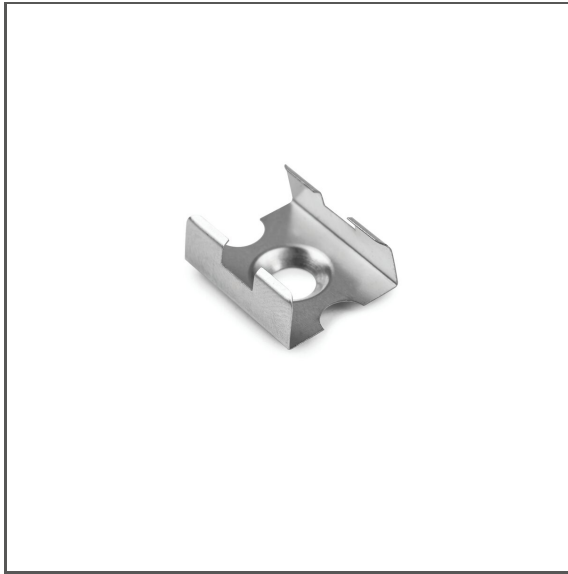

## TECHNICAL DRAWING

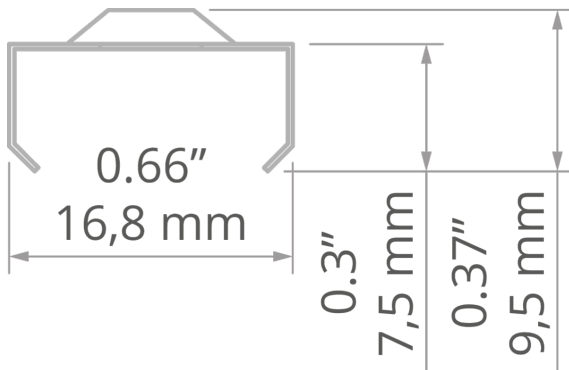

## TECHNICAL SPECIFICATIONS

Material	stainless steel
Color	■ silver
Width	0.66"

Height	0.37"
Lifting capacity	11 lb