


EcoFlex 4-in-1 LED Neon - Vertical Bend

LN-ECO-VB-RGB3000K, LN-ECO-VB-RGB6500K, LN-ECO-VB-RGBA

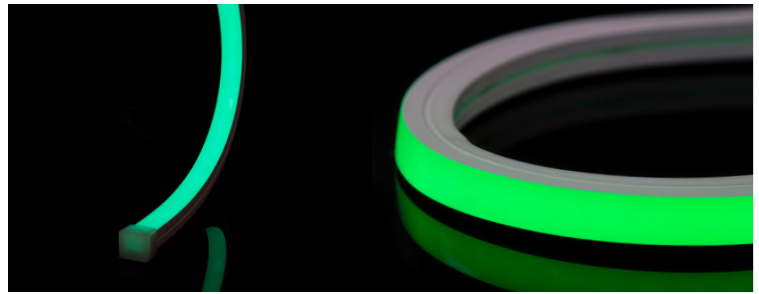

PRODUCT DESCRIPTION

EcoFlex 4-in-1, RGB + [3000K/6500K/Amber] LED Neon is a highly flexible and cost-effective LED Neon product that expands your neon color mixing possibilities by combining 3000K/6500K/Amber and RGB. This neon allows you to achieve the creative potential of traditional glass neon while getting all the benefits of LED. This is the “vertical bend” version, which means it bends like standard strip light, but provides the diffused look of neon. It can be used to wrap around three-dimensional objects like columns, with the light shining outward.

EcoFlex LED Neon is UL Listed and saves time and money on installation. It runs on 24 volts DC and its silicone casing provides protection and excellent diffusion for a hotspot-free appearance. EcoFlex LED Neon is incredibly flexible, with a 40mm minimum vertical bending radius. It is low maintenance and easy to control. This product comes with 39 inch [1 meter] leads on each end so it can be cut and capped, if needed. It is ideal for use in scenic, architectural, retail and other decorative lighting installations.

PRODUCT FEATURES

- Flexible silicone housing
- UV resistant and low maintenance
- Bends vertically (opposite direction of our standard Neon product lines)
- 4-in-1 [RGB + 3000K, 6500K or Amber]
- Available in 5 and 10-meter reel lengths
- 1-meter waterproof leads on both ends of each reel
- Average Lifetime: 50,000 Hours


REGULATORY

- UL Listed
- RoHS Compliant
- Warranty: 5 Year Limited

TECHNICAL SPECIFICATIONS

Product	LN-ECO-VB-RGB3000K-10m, LN-ECO-VB-RGB3000K-5m	LN-ECO-VB-RGB6500K-10m, LN-ECO-VB-RGB6500K-5m	LN-ECO-VB-RGBA-10m, LN-ECO-VB-RGBA-5m
Color Detail	RGB + 3000K	RGB + 6500K	RGB + Amber
Wave Length	630/520/463	630/520/463	630/520/463
Power (Watts/meter)	9.6 Watts/m	9.6 Watts/m	9.6 Watts/m
Power (Watts/foot)	2.9 Watts/ft	2.9 Watts/ft	2.9 Watts/ft
Brightness	41/136/29/127 lumens/m	41/136/29/127 lumens/m	41/136/29/39 lumens/m
Beam Angle	120°	120°	120°
Width	0.63 in [16 mm]	0.63 in [16 mm]	0.63 in [16 mm]
Length	32.81 ft [10 m], 16.4 ft [5 m]	32.81 ft [10 m], 16.4 ft [5 m]	32.81 ft [10 m], 16.4 ft [5 m]
Min. Cutting Increment	2.46 in [62.5 mm]	2.46 in [62.5 mm]	2.46 in [62.5 mm]
LED Density	96 LEDs/m	96 LEDs/m	96 LEDs/m
LED Spacing	0.41 in [10.42 mm]	0.41 in [10.42 mm]	0.41 in [10.42 mm]
IP Rating	IP65	IP65	IP65

MECHANICAL SPECIFICATIONS

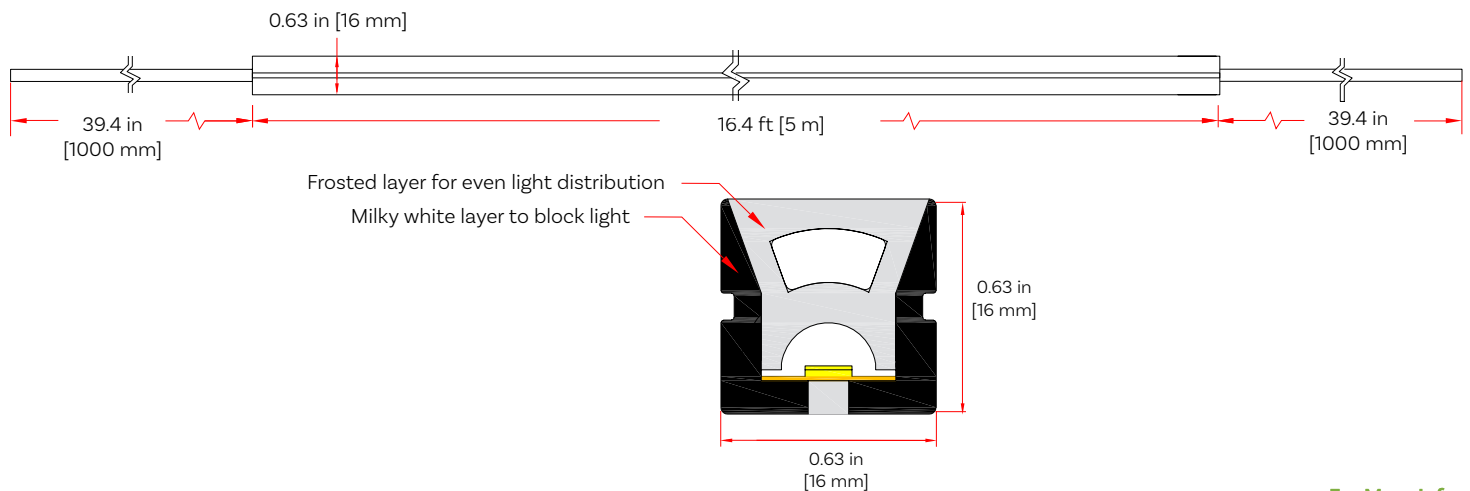

PRODUCT ACCESSORIES


A END CONNECTORS




EcoFlex LED Neon - Vertical Bend - End Cap

LN-ECO-VB-EC


End Cap accessory is compatible with EcoFlex 4-in-1 Vertical Bend LED Neon. Glue is sold separately. Please note user installation of end caps will void factory IP rating of EcoFlex 4-in-1 LED neon.



FRONT




TOP




EcoFlex LED Neon - Vertical Bend - Straight Exit Solder Connection Kit

LN-ECO-VB-S4


End cap with straight wire exit is compatible with EcoFlex 4-in-1 Vertical Bend LED Neon. End cap with straight wire exit includes 1-meter leads. Glue is sold separately.



FRONT




TOP




EcoFlex LED Neon - Vertical Bend - Right Exit Solder Connection Kit

LN-ECO-VB-R4


End cap with right wire exit is compatible with EcoFlex 4-in-1 Vertical Bend LED Neon. End cap with right wire exit includes 1-meter leads. Based on positioning of the cap, this can be used for right or left side wire exit. Glue is sold separately.




FRONT



TOP



B MOUNTING PROFILE




Vertical Bend - Mounting Channel - 2m


LN-ECO-VB-ACH-2m

Aluminum channel designed for mounting EcoFlex 4-in-1 LED Neon - Vertical Bend and holding it in place. Screws not included.

FRONT



PROFILE




Vertical Bend - Mounting Clip


LN-ECO-VB-CLIP

Used for mounting EcoFlex 4-in-1 LED Neon - Vertical Bend and holding it in place. Screw not included.

FRONT



PROFILE



BOTTOM

