

ProFlex Strip Installation Manual




Warnings

- Before making any cuts or performing installation/maintenance, be sure all electricity is disconnected.
- Operate ProFlex Strip Light according to instructions only.
- Connect and cut this product correctly. Must use cutting shears designed to cut ProFlex Strip Light (listed in accessories tab).
- Do not use any glue with this product as glue may cause damage to the product.

Caution

- Use only recommended shears, connectors, and accessories.
- Do not operate in more than 45°C (113°F) ambient temperature for 15W/m strip.
- Do not operate in more than 55°C (131°F) ambient temperature for 12W/m strip.
- Do not operate when ambient temperature is below -40°C (-40°F).
- Incorrect operation will damage the circuitry

Handling



Vertical Bending

VB: Vertical bending against the light surface.


Only bend the strip in its intended direction.




Do not handle more than 2 meters unsupported. Support longer sections at multiple points to avoid excess stress, bending or twisting.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

Installation

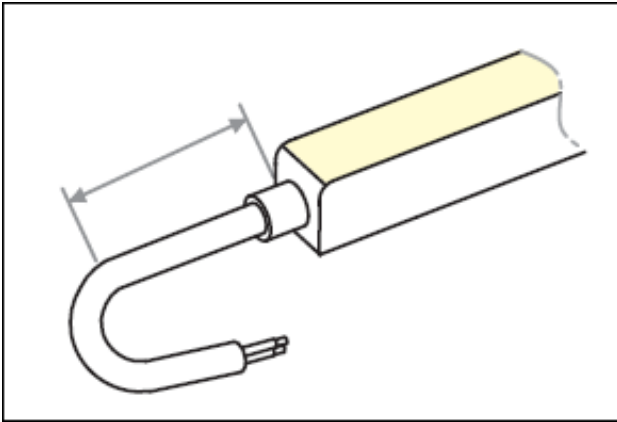

Leave 20mm of cable extended from the connector before bending.

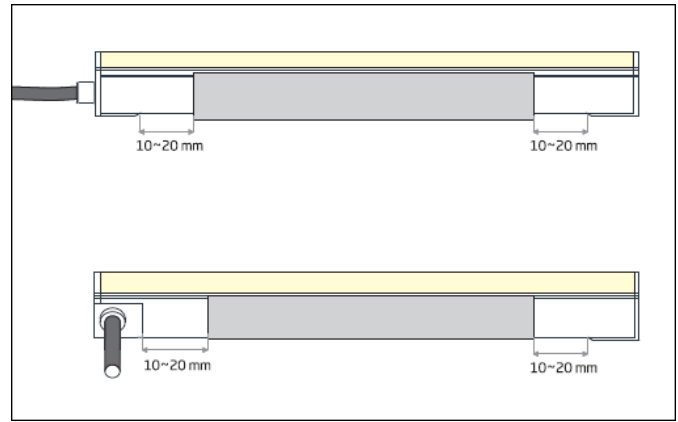

Reserve 10-20mm of space between the connector edge and channel.



Reserve 5mm of space in between sections of channel to allow for contraction and expansion.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.