

Eluxtra™

Eluxtra™ ProFlex LED Neon, Monochrome

LN-PF-XXXXK-5m, LN-PF-XXXXK-10m





PRODUCT DESCRIPTION

Eluxtra™ ProFlex LED Neon is a rugged and versatile option for achieving the creative potential of neon lighting. This monochrome strip light is encased in a flexible silicone housing that provides excellent diffusion, and at IP68, it is ideal for indoor and outdoor use. Injection molded ends ensure your lighting will remain free from dust and water.

Eluxtra™ ProFlex LED Neon is UL Listed and can run up to 15 meters when powered from one end. It operates on 24 VDC and is easily controlled using one of our compatible controllers or dimmers. Custom lengths and wire exits available by request.

Ideal Application: Ideal for indoor and outdoor applications and is an ideal product for retail, hospitality, scenic and architectural installations.

MECHANICAL SPECIFICATIONS



TECHNICAL SPECIFICATIONS

Product Number	LN-PF-2700K-Xm	LN-PF-3000K-Xm	LN-PF-4000K-Xm	LN-PF-5700K-Xm
Ambient Temperature	-40°C to 55°C	-40°C to 55°C	-40°C to 55°C	-40°C to 55°C
Average Lifetime	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Beam Angle	110°	110°	110°	110°
Brightness	360 lm/meter	400 lm/meter	400 lm/meter	400 lm/meter
Color Detail	2700K	3000K	4000K	5700K
Density	72 LEDs/m	72 LEDs/m	72 LEDs/m	72 LEDs/m
Height	0.83 in [21 mm]	0.83 in [21 mm]	0.83 in [21 mm]	0.83 in [21 mm]
Input Current	2500 mA / 5000 mA	2500 mA / 5000 mA	2500 mA / 5000 mA	2500 mA / 5000 mA
Input Voltage	24 DC	24 DC	24 DC	24 DC
IP Rating	IP68	IP68	IP68	IP68
Linkable Up To	15 meters	15 meters	15 meters	15 meters
Lead Detail	Bare Wire / 2m (both)	Bare Wire / 2m (both)	Bare Wire / 2m (both)	Bare Wire / 2m (both)
LED Node Size	2835	2835	2835	2835
Length	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]
Min. Cutting Increment	3.28 in [83.3 mm]	3.28 in [83.3 mm]	3.28 in [83.3 mm]	3.28 in [83.3 mm]
Power (Watts/ft)	3.7 Watts/ft	3.7 Watts/ft	3.7 Watts/ft	3.7 Watts/ft
Power (Watts/m)	12 Watts/m	12 Watts/m	12 Watts/m	12 Watts/m
Regulatory	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE
Warranty	5 years limited	5 years limited	5 years limited	5 years limited
Width	0.45 in [11.5 mm]	0.45 in [11.5 mm]	0.45 in [11.5 mm]	0.45 in [11.5 mm]

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.



Environmental Lights
888-880-1880
contactus@environmentallights.com



City Theatrical
US: 800-230-9497 / sales@citytheatrical.com
UK: +44 (0)20 8949 5051 / salesuk@citytheatrical.com



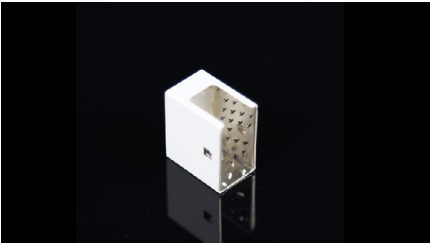
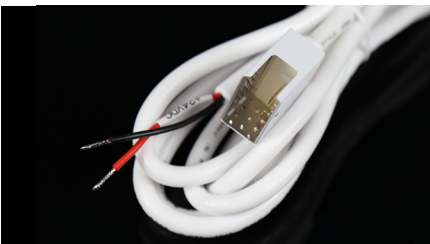
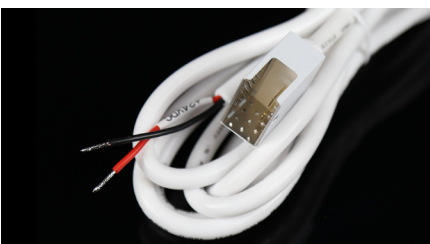

PRODUCT FEATURES

- High-quality silicone casing engineered for durability & easy maintenance
- Silicone casing provides excellent diffusion
- Flexible & easy to install
- IP68, suitable for indoor or outdoor use
- Dust resistant
- Run length up to 15 meters when powered from one end
- 2-meter input & output leads
- Compatible connectors available

REGULATORY

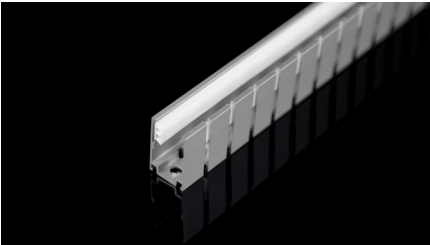

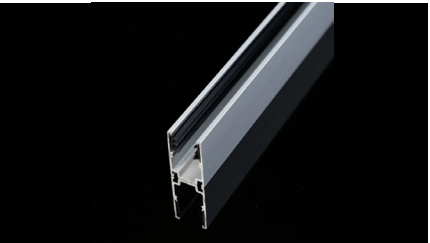


- UL Listed, RoHS, UKCA & CE Compliant
- Warranty: 5 Year Limited

CONNECTORS & ACCESSORIES

Product	Description
<p>Eluxtra™ ProFlex LED Neon, End Cap LN-PF-ST-EC</p> 	<p>This IP68 end cap is used to seal Eluxtra™ ProFlex LED Neon. It gives your lighting a finished look and protects them from dust and rain. It is durable and easy to install.</p>
<p>Eluxtra™ ProFlex LED Neon, 2-Wire Connector 01 LN-PF-2-ST-01-2m</p> 	<p>This is a 2-wire, IP68 connector designed for use with Eluxtra™ ProFlex LED strip lights. It features a 2-meter lead, providing flexibility for various setups. Look for the “01” marking on your strip light to ensure you are connecting in the proper direction.</p>
<p>Eluxtra™ ProFlex LED Neon, 2-Wire Connector 02 LN-PF-2-ST-02-2m</p> 	<p>This is a 2-wire, IP68 connector designed for use with Eluxtra™ ProFlex LED strip lights. It features a 2-meter lead, providing flexibility for various setups. Look for the “02” marking on your strip light to ensure you are connecting in the proper direction.</p>
<p>Eluxtra™ ProFlex LED Neon, 2-Wire Jumper LN-PF-2-SPS-JUMP-300mm</p> 	<p>This is a 2-wire, IP68 jumper designed to connect two sections of Eluxtra™ ProFlex LED strip lights that have been cut to custom lengths. Look for the “01” and “02” markings on your strip light to ensure you are connecting in the proper direction.</p>

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

CONNECTORS & ACCESSORIES CONT'D

Product	Description
<p>Eluxtra™ ProFlex LED Neon, Secure Grip Flexible Mounting Channel, 1m LN-PF-U-SG-FLEX-1m</p> 	<p>This is a flexible aluminum mounting channel compatible with Eluxtra™ ProFlex LED Neon. The secure-grip design enables you to mount and protect your lighting with ease. Sold in 1-meter units.</p>
<p>Eluxtra™ ProFlex LED Neon, Mounting Clip LN-PF-U-CLIP</p> 	<p>This is a high-grade aluminum extrusion designed for Eluxtra™ ProFlex LED Neon. The neon fits snug with no need for adhesives or fasteners to hold it in place.</p> <p>Each clip has one hole pre-drilled in the back and comes with one screw. It is easy to secure using a power screwdriver.</p>
<p>Eluxtra™ ProFlex LED Neon, Secure Grip Mounting Channel, 2m LN-PF-U-SG-2m</p> 	<p>This is a high-grade aluminum mounting channel compatible with Eluxtra™ ProFlex LED Neon. The secure-grip design enables you to mount and protect your lighting with ease. Sold in 2-meter units.</p> <p>The channel comes with five screws. It can be easily secured using a power screwdriver and cuts easily using any metal saw.</p>
<p>Eluxtra™ ProFlex LED Neon, Secure Grip Mounting Clip LN-PF-U-SG-Clip</p> 	<p>This is a high-grade aluminum extrusion designed for Eluxtra™ ProFlex LED Neon. The secure-grip design enables you to mount and protect your lighting with ease, ensuring that the neon stays in place.</p> <p>Each clip has one hole pre-drilled in the back and comes with one screw. It is easy to secure using a power screwdriver.</p>
<p>Eluxtra™ ProFlex LED Neon, Mounting Channel - 2m LN-PF-U-2m</p> 	<p>This is a high-grade aluminum mounting channel compatible with Eluxtra™ ProFlex LED Neon. The neon fits snug with no need for adhesives or fasteners to hold it in place. Sold in 2-meter units.</p> <p>Each channel has 10 holes pre-drilled in the back and comes with 10 screws that are 13.42mm (just over ½ inch) long. It can be easily secured using a power screwdriver and cuts easily using any metal saw.</p>

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

CONNECTORS & ACCESSORIES CONT'D

Note: Silicone Injection Molded Connectors are available by custom request. Contact your Sales Representative for more information.

Product	Description
Injection Molded Front End Connector 	Silicone injection molded Front End Connector is available via custom order.
Injection Molded Front Connector Side from Left 	Silicone injection molded Front Connector Side from Left is available via custom order.
Injection Molded Front Connector Side from Right 	Silicone injection molded Front Connector Side from Right is available via custom order.
Injection Molded Front Connector Side from Bottom 	Silicone injection molded Front Connector from bottom is available via custom order.
Injection Molded End Cap 	Silicone injection molded End Cap is available via custom order.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.



Environmental Lights
 888-880-1880
contactus@environmentallights.com



City Theatrical
 US: 800-230-9497 / sales@citytheatrical.com
 UK: +44 (0)20 8949 5051 / salesuk@citytheatrical.com