

REVI XLC 4-inch Adjustable Downlight

Open- **REVI-XLC-4SCALCDB79VB-X-X-X-WC, 4SCAH-X**
Lensed- **REVI-XLC-4SCALCDB79VB-X-X-L-WC, 4SCA-X-X**

PRODUCT DESCRIPTION

Low voltage LED lighting fixtures using REVI remote driver platforms are ideally suited to improve LED illumination and reliability. Remote driver platforms are useful in difficult-to-access ceilings or architectural features. The REVI XLC downlight fixtures allow lighting designers and integrators to select from specific lumen levels, correlated color temperature, beam distribution, and finishes to configure a comprehensive lighting solution.

Ideal Application: Sloped ceilings and wall wash applications in House of Worship, Auditoriums, Gymnasiums and pendants up to 6,181 lumens.

SYSTEM FEATURES


- Dual-optic system includes upper cone which determines the beam distribution and lower reflector to finish the ceiling without glare and features a 45° cut-off to source and source image.
- Single axis adjustable chassis that tilts up to 38° to accommodate sloped ceilings or to provide wall wash and accent lighting.
- Heavy-gauge galvanized steel housing provides a secure mounting platform for the electrical components and protects the optical assembly.
- Vertically adjustable mounting brackets accept expandable hanger bars which are included.

TECHNICAL DATA


- All power leads include WAGO™ connectors for fast power connection
- Thermally protected
- See table for wattages and delivered lumens at various drive currents
- L70 = 50,000 hours at 45°
- CRI 90+ is standard for fixtures. CRI 95+ option is available for applications up to 1200mA.

REMOTE DRIVER OPTIONS

The REVI system features a remote panel that operates multiple lighting fixtures. These remote power supplies can be installed in an easy-to-access area such as a utility closet. Benefits include longer driver life due to reduced exposure to the heat of the LED engine and emergency (EM) options. Low-voltage class-2 wiring between driver panel and lighting fixture. No conduit required.

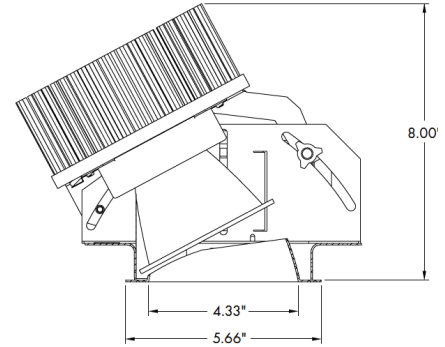

Rough Opening: 5.13"

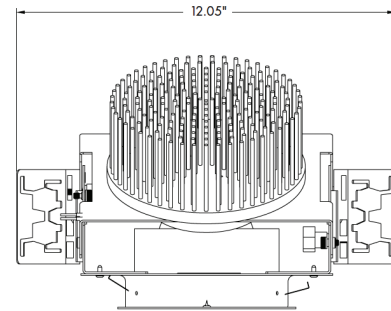

5 Year
Warranty



ASSEMBLY BUILDER [OPEN]

REVI-XLC-4SCALCDB79VB

Fixture Catalog Number

Example: REVI-XLC-4SCALCDB79VBT- **5K-N**-WC = 5000K Color Temperature with 95+ CRI, 35° Narrow Beam

REVI-XLC-4SCALCDB79VB				WC
Fixture Series	Color Rendering Index	Color Temperature	Beam	WAGO™ Connector
	C9 = 90+*	5K = 5000K	N = 35°	
	T = 95+*	4K = 4000K	M = 50°	
		35K = 3500K	W = 70°	
		3K = 3000K	G1 = Wall Wash	
		27K = 2700K	G2 = Forward Throw	

*By default, all fixtures come with 90 CRI unless otherwise indicated. For 95+ CRI, replace "C9" with T, Ex: REVI-XLC-4SCALCDB79VBC9-5K-N-WC > **REVI-XLC-4SCALCDB79VBT-5K-N-WC**

4SCAH

Flange Catalog Number

Example: 4SCAH-**HAZ** = Haze Alzak Reflector w/ Matte White Flange

4SCAH	
Trim Series	Flange
	SCLPF = Soft Spec Clear Reflector w/ Polished Flange***
	SCL = Soft Spec Clear Reflector w/ Matte White Flange***
	HAZPF = Haze Alzak Reflector w/ Polished Flange***
	HAZ = Haze Alzak Reflector w/ Matte White Flange***
	MWH = Matte White Reflector w/ Matte White Flange***
	WL = Wet Location

** Lumen output and beam spreads will vary upon lens.

*** By default, all fixtures come with SCLPF (Soft Spec Clear Reflector w/ Polished Flange) unless otherwise indicated. All flange options are damp rated unless the WL (Wet Location) option is chosen.

ASSEMBLY BUILDER [LENSED]

REVI-XLC-4SCALCDB79VB

Fixture Catalog Number

Example: REVI-XLC-4SCALCDB79VBT-5K-L-WC = 5000K Color Temperature with 95+ CRI, 35° Narrow Beam

REVI-XLC-4SCALCDB79VB			L	WC
Fixture Series	Color Rendering Index	Color Temperature	Lensed	WAGO™ Connector
	C9 = 90+*	5K = 5000K		
	T = 95+*	4K = 4000K		
		35K = 3500K		
		3K = 3000K		
		27K = 2700K		

*By default, all fixtures come with 90 CRI unless otherwise indicated. For 95+ CRI, replace "C9" with T - Example: REVI-XLC-4SCALCDB79VBC9-5K-L-WC > **REVI-XLC-4SCALCDB79VBT-5K-L-WC**

4SCA

Flange Catalog Number

Example: 4SCA-L3-HAZ = Prismatic Glass Lens, Haze Alzak Reflector w/ Matte White Flange

4SCA		
Trim Series	Lens	Flange
	L3 = Prismatic Glass Lens**	SCLPF = Soft Spec Clear Reflector w/ Polished Flange***
	L5 = Frosted Glass Lens**	SCL = Soft Spec Clear Reflector w/ Matte White Flange***
	L6 = Frosted Acrylic Lens**	HAZPF = Haze Alzak Reflector w/ Polished Flange***
	L7= Solite Micro-Prismatic Glass Lens**	HAZ = Haze Alzak Reflector w/ Matte White Flange***
	L8 = Clear Poly Carbonate Lens**	MWH = Matte White Reflector w/ Matte White Flange***
	L9 = Clear Tempered Glass Lens**	WL = Wet Location

** Lumen output and beam spreads will vary upon lens.

*** By default, all fixtures come with SCLPF (Soft Spec Clear Reflector w/ Polished Flange) unless otherwise indicated. All flange options are damp rated unless the WL (Wet Location) option is chosen.

DELIVERED LUMEN FOR LOW-OUTPUT DRIVER SETTINGS

Data based on fixture with 3500K Color Temperature at listed drive currents powered by REVI-Drive-12-250W and REVI-Drive-4-100W.

Fixture	Trim	Current (mA)	Wattage	Rated Lumens	Delivered Lumens	Beam Distribution	LPW
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	200	7	1000	944	40°	134.81
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	200	7	1000	935	50°	133.56
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	200	7	1000	698	60°	99.71
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	200	7	1000	680	70°	97.13
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	300	10	1500	1201	40°	120.11
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	300	10	1500	1190	50°	118.99
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	300	10	1500	888	60°	88.83
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	300	10	1500	865	70°	86.53
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	350	12	1750	1544	40°	128.69
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	350	12	1750	1530	50°	127.49
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	350	12	1750	1142	60°	95.18
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	350	12	1750	1113	70°	92.72
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	400	14	2000	1887	40°	134.81
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	400	14	2000	1870	50°	133.56
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	400	14	2000	1396	60°	99.71
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	400	14	2000	1360	70°	97.13
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	500	17	2500	2316	40°	136.25
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	500	17	2500	2295	50°	134.98
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	500	17	2500	1713	60°	100.77
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	500	17	2500	1669	70°	98.17

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

(Delivered Lumen data continued on next page)

DELIVERED LUMEN FOR HIGH-OUTPUT DRIVER SETTINGS

Data based on fixture with 3500K Color Temperature at listed drive currents powered by REVI-Drive-4-384W.

Fixture	Trim	Current (mA)	Wattage	Rated Lumens	Delivered Lumens	Beam Distribution	LPW
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	600*	21	3000	2745	40°	130.73
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	600*	21	3000	2720	50°	129.51
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	600*	21	3000	2030	60°	96.69
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	600*	21	3000	1978	70°	94.19
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	700*	25	3500	3174	40°	126.97
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	700*	25	3500	3145	50°	125.79
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	700*	25	3500	2348	60°	93.91
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	700*	25	3500	2287	70°	91.48
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	800	29	4000	3603	40°	124.25
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	800	29	4000	3570	50°	123.09
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	800	29	4000	2665	60°	91.89
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	800	29	4000	2596	70°	89.52
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	1000	36	5000	4461	40°	123.92
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	1000	36	5000	4419	50°	122.76
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	1000	36	5000	3299	60°	91.65
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	1000	36	5000	3214	70°	89.28
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	1200	44	6000	5319	40°	120.89
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	1200	44	6000	5269	50°	119.76
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	1200	44	6000	3934	60°	89.41
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	1200	44	6000	3832	70°	87.10
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	1750	65	8000	7378	40°	113.51
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	1750	65	8000	7309	50°	112.45
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	1750	65	8000	5457	60°	83.95
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	1750	65	8000	5316	70°	81.78
REVI-XLC-4SCALCDB79VB35KM40	4SCAHSCLPF	2100	80	10000	8579	40°	107.24
REVI-XLC-4SCALCDB79VB35KM50	4SCAHSCLPF	2100	80	10000	8499	50°	106.24
REVI-XLC-4SCALCDB79VB35KM60	4SCAHSCLPF	2100	80	10000	6345	60°	79.31
REVI-XLC-4SCALCDB79VB35KM70	4SCAHSCLPF	2100	80	10000	6181	70°	77.26

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L3 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	200	7	847	54°	121.02
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	300	10	1078	54°	107.81
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	350	12	1386	54°	115.52
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	400	14	1694	54°	121.02
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	500	17	2079	54°	122.31
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	600*	21	2464	54°	117.35
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	700*	25	2849	54°	113.97
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	800	29	3234	54°	111.53
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	1000	36	4004	54°	111.21
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	1200	44	4774	54°	108.49
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	1750	65	6622	54°	101.88
	REVI-XLC-4SCALCDB79VB35L	4SCAL3SCLPF	C73 PRISMATIC	2100	80	7700	54°	96.25

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L5 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	200	7	767	47°	109.53
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	300	10	976	47°	97.58
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	350	12	1255	47°	104.55
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	400	14	11533	47°	109.53
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	500	17	1882	47°	110.70
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	600*	21	2230	47°	106.21
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	700*	25	2579	47°	103.16
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	800	29	2927	47°	100.94
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	1000	36	3624	47°	100.66
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	1200	44	4321	47°	98.20
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	FROSTED GLASS	1750	65	5993	47°	92.21
	REVI-XLC-4SCALCDB79VB35L	4SCAL5SCLPF	ROSTED GLASS	2100	80	6969	47°	87.11

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L6 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	200	7	804	54°	114.87
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	300	10	1023	54°	102.34
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	350	12	1316	54°	109.65
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	400	14	1608	54°	114.87
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	500	17	1974	54°	116.10
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	600*	21	2339	54°	111.39
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	700*	25	2705	54°	108.19
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	800	29	3070	54°	105.87
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	1000	36	3800	54°	105.57
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	1200	44	4531	54°	102.99
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	1750	65	6286	54°	96.70
	REVI-XLC-4SCALCDB79VB35L	4SCAL6SCLPF	FROSTED ACRYLIC	2100	80	7309	54°	91.36

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L7 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	200	7	888	50°	126.89
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	300	10	1131	50°	113.05
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	350	12	1454	50°	121.13
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	400	14	1777	50°	126.89
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	500	17	2180	50°	128.25
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	600*	21	2584	50°	123.05
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	700*	25	2988	50°	119.51
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	800	29	3392	50°	116.95
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1000	36	4198	50°	116.61
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1200	44	50006	50°	113.76
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1750	65	6944	50°	106.82
	REVI-XLC-4SCALCDB79VB35L	4SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	2100	80	8074	50°	100.93

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L8 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	200	7	869	50°	124.09
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	300	10	1106	50°	110.55
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	350	12	1421	50°	118.45
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	400	14	1737	50°	124.09
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	500	17	2132	50°	125.42
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	600*	21	2527	50°	120.33
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	700*	25	2922	50°	116.87
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	800	29	3317	50°	114.36
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	1000	36	4105	50°	114.03
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	1200	44	4895	50°	111.25
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	1750	65	6790	50°	104.46
	REVI-XLC-4SCALCDB79VB35L	4SCAL8SCLPF	CLEAR POLY CARBONATE	2100	80	7896	50°	98.69

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L9 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	200	7	870	50°	124.36
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	300	10	1108	50°	110.79
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	350	12	1424	50°	118.70
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	400	14	1741	50°	124.36
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	500	17	2137	50°	125.69
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	600*	21	2532	50°	120.59
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	700*	25	2928	50°	117.12
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	800	29	3324	50°	114.61
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	1000	36	4114	50°	114.28
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	1200	44	4905	50°	111.49
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	1750	65	6805	50°	104.69
	REVI-XLC-4SCALCDB79VB35L	4SCAL9SCLPF	CLEAR TEMPERED GLASS	2100	80	7913	50°	98.91

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for LW6 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	200	7	813	46°H X 58°V	116.21
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	300	10	1035	46°H X 58°V	103.53
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	350	12	1331	46°H X 58°V	110.93
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	400	14	1627	46°H X 58°V	116.21
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	500	17	1997	46°H X 58°V	117.45
REVI-DriveXL-4-384W	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	600*	21	2366	46°H X 58°V	112.69
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	700*	25	2736	46°H X 58°V	109.45
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	800	29	3106	46°H X 58°V	107.10
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	1000	36	3845	46°H X 58°V	106.79
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	1200	44	4584	46°H X 58°V	104.18
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	1750	65	6359	46°H X 58°V	97.83
	REVI-XLC-4SCALCDB79VB35L	4SCALW6SCLPF	LINEAR SPREAD LENS	2100	80	7394	46°H X 58°V	92.43


Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68


*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

Typical Layout for Low Voltage LED Lighting Fixtures with Remote Driver Platform

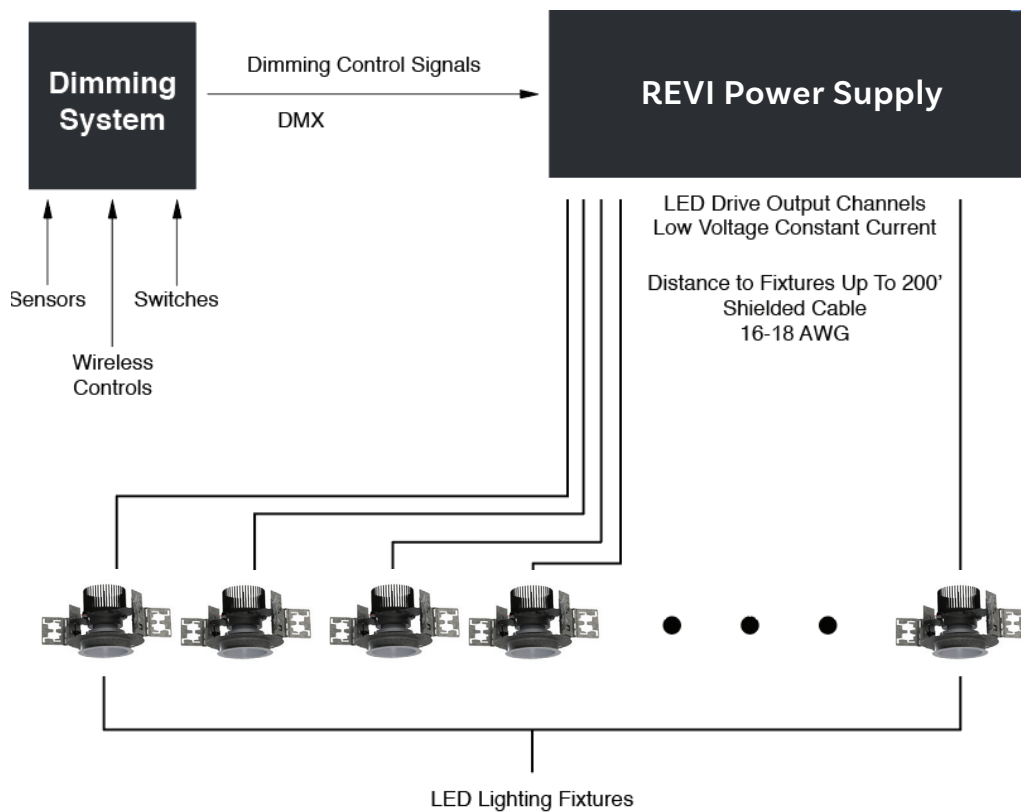

OPTIONS AND ACCESSORIES

REFLECTOR FINISHES



Clear
Soft Specular "SCL"




Haze
Diffused "HAZ"

Our standard reflector finish is soft Haze Diffused (HAZ) with a polished self-flange (PF). These are offered in both a soft specular and a diffused/matte finish. Specified suffix of desired finish.

Example: 4VLEDSCLPF

For white painted flange omit PF.

STANDARD HANGER BARS

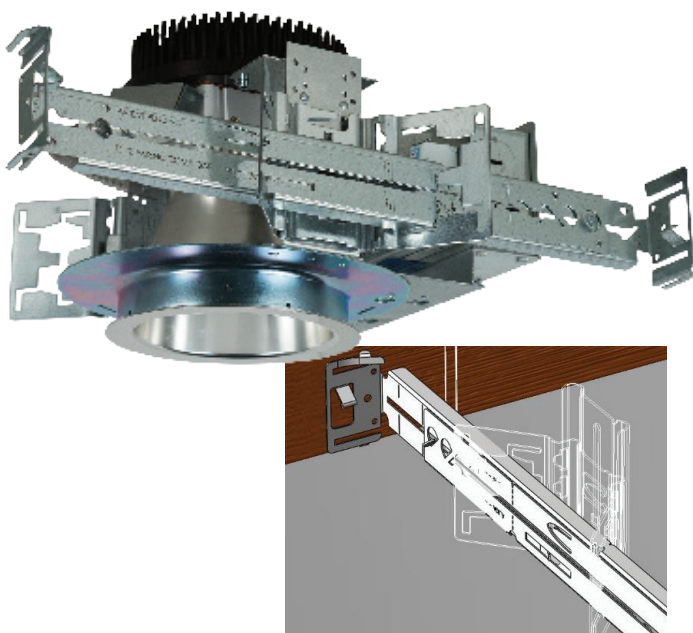

Interlocking L-Bar hanger bars are now standard with this lighting fixture. Installer friendly features include:

- L-Bars are fabricated from identical L-shaped cross sections that form a sturdy 1/2" by 1-1/2" C-channel profile for superior rigidity.
- Pre-marked with spacing locations for 24" T-bar; 16" and 24" joist ceilings (wood and metal)
- Extension locks with an easy-to-use integral twist tab. No separate fastener.
- Interlocking and expandable to 24". Can be increased to 36" or 48" with the use of additional bars. For more details, please contact your sales engineer.
- Allows for offset mounting.
- Integral and barbed nail spike for wood joist ceilings.
- Fits into the C-channel notches on our butterfly mounting bracket.