

REVI XLC 6-inch Adjustable Downlight

Open- **REVI-XLC-6SCALCDB79VB-X-X-X-WC, 6SCAH-X**
Lensed- **REVI-XLC-6SCALCDB79VB-X-X-L-WC, 6SCA-X-X**

PRODUCT DESCRIPTION

Low voltage LED lighting fixtures using REVI remote driver platforms are ideally suited to improve LED illumination and reliability. Remote driver platforms are useful in difficult-to-access ceilings or architectural features. The REVI XLC downlight fixtures allow lighting designers and integrators to select from specific lumen levels, correlated color temperature, beam distribution, and finishes to configure a comprehensive lighting solution.

Ideal Application: Sloped ceilings and wall wash applications in House of Worship, Auditoriums, Gymnasiums and pendants up to 6,181 lumens.

SYSTEM FEATURES



- Dual-optic system includes upper cone which determines the beam distribution and lower reflector to finish the ceiling without glare and features a 45° cut-off to source and source image.
- Single axis adjustable chassis that tilts up to 38° to accommodate sloped ceilings or to provide wall wash and accent lighting.
- Heavy-gauge galvanized steel housing provides a secure mounting platform for the electrical components and protects the optical assembly.
- Vertically adjustable mounting brackets accept expandable hanger bars which are included.

TECHNICAL DATA

- All power leads include WAGO™ connectors for fast power connection
- Thermally protected
- See table for wattages and delivered lumens at various drive currents
- L70 = 50,000 hours at 45°
- CRI 90+ is standard for fixtures. CRI 95+ option is available for applications up to 1200mA.

REMOTE DRIVER OPTIONS

The REVI system features a remote panel that operates multiple lighting fixtures. These remote power supplies can be installed in an easy-to-access area such as a utility closet. Benefits include longer driver life due to reduced exposure to the heat of the LED engine and emergency (EM) options. Low-voltage class-2 wiring between driver panel and lighting fixture. No conduit required.

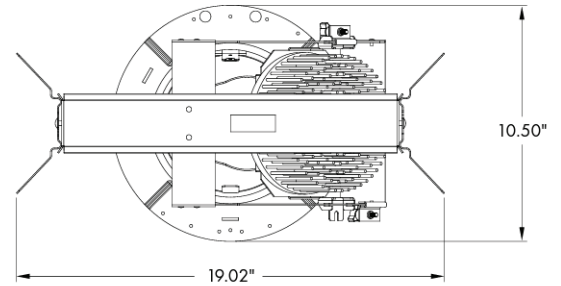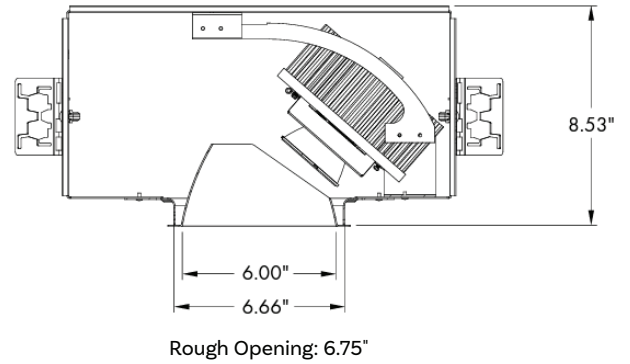

5 Year
Warranty



ASSEMBLY BUILDER [OPEN]

REVI-XLC-6SCALCDB79VB

Fixture Catalog Number

Example: REVI-XLC-6SCALCDB79VBT- **5K-N**-WC = 5000K Color Temperature with 95+ CRI, 35° Narrow Beam

REVI-XLC-6SCALCDB79VB				WC
Fixture Series	Color Rendering Index	Color Temperature	Beam	WAGO™ Connector
	C9 = 90+*	5K = 5000K	N = 35°	
	T = 95+*	4K = 4000K	M = 50°	
		35K = 3500K	W = 70°	
		3K = 3000K	G1 = Wall Wash	
		27K = 2700K	G2 = Forward Throw	

*By default, all fixtures come with 90 CRI unless otherwise indicated. For 95+ CRI, replace "C9" with T, Ex: REVI-XLC-6SCALCDB79VBC9-5K-N-WC > **REVI-XLC-6TSCALCDB79VBT-5K-N-WC**

6SCAH

Flange Catalog Number

Example: 6SCAH-**HAZ** = Haze Alzak Reflector w/ Matte White Flange

6SCAH	
Trim Series	Flange
	SCLPF = Soft Spec Clear Reflector w/ Polished Flange***
	SCL = Soft Spec Clear Reflector w/ Matte White Flange***
	HAZPF = Haze Alzak Reflector w/ Polished Flange***
	HAZ = Haze Alzak Reflector w/ Matte White Flange***
	MWH = Matte White Reflector w/ Matte White Flange***
	WL = Wet Location

** Lumen output and beam spreads will vary upon lens.

*** By default, all fixtures come with SCLPF (Soft Spec Clear Reflector w/ Polished Flange) unless otherwise indicated. All flange options are damp rated unless the WL (Wet Location) option is chosen.

ASSEMBLY BUILDER [LENSED]

REVI-XLC-6SCALCDB79VB

Fixture Catalog Number

Example: REVI-XLC-6SCALCDB79VBT-5K-L-WC = 5000K Color Temperature with 95+ CRI, 35° Narrow Beam

REVI-XLC-6SCALCDB79VB			L	WC
Fixture Series	Color Rendering Index	Color Temperature	Lensed	WAGO™ Connector
	C9 = 90+*	5K = 5000K		
	T = 95+*	4K = 4000K		
		35K = 3500K		
		3K = 3000K		
		27K = 2700K		

*By default, all fixtures come with 90 CRI unless otherwise indicated. For 95+ CRI, replace "C9" with T - Example: REVI-XLC-6SCALCDB79VBC9-5K-L-WC > **REVI-XLC-6SCALCDB79VBT-5K-L-WC**

6SCA

Flange Catalog Number

Example: 6SCA-L3-HAZ = Prismatic Glass Lens, Haze Alzak Reflector w/ Matte White Flange

6SCA		
Trim Series	Lens	Flange
	L3 = Prismatic Glass Lens**	SCLPF = Soft Spec Clear Reflector w/ Polished Flange***
	L5 = Frosted Glass Lens**	SCL = Soft Spec Clear Reflector w/ Matte White Flange***
	L6 = Frosted Acrylic Lens**	HAZPF = Haze Alzak Reflector w/ Polished Flange***
	L7= Solite Micro-Prismatic Glass Lens**	HAZ = Haze Alzak Reflector w/ Matte White Flange***
	L8 = Clear Poly Carbonate Lens**	MWH = Matte White Reflector w/ Matte White Flange***
	L9 = Clear Tempered Glass Lens**	WL = Wet Location

** Lumen output and beam spreads will vary upon lens.

*** By default, all fixtures come with SCLPF (Soft Spec Clear Reflector w/ Polished Flange) unless otherwise indicated. All flange options are damp rated unless the WL (Wet Location) option is chosen.

DELIVERED LUMEN FOR LOW-OUTPUT DRIVER SETTINGS

Data based on fixture with 3500K Color Temperature at listed drive currents powered by REVI-Drive-12-250W and REVI-Drive-4-100W.

Fixture	Trim	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	200	7	1015	40°	145.00
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	200	7	992	50°	141.68
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	200	7	1020	60°	145.75
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	200	7	974	70°	139.09
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	300	10	1292	40°	129.18
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	300	10	1262	50°	126.22
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	300	10	1299	60°	129.85
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	300	10	1239	70°	123.91
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	350	12	1661	40°	138.41
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	350	12	1623	50°	135.24
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	350	12	1670	60°	139.13
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	350	12	1593	70°	132.77
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	400	14	2023	40°	145.00
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	400	14	1984	50°	141.68
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	400	14	2041	60°	145.75
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	400	14	1947	70°	139.09
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	500	17	2491	40°	146.55
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	500	17	2434	50°	143.20
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	500	17	2504	60°	147.31
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	500	17	2390	70°	140.57

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

(Delivered Lumen data continued on next page)

DELIVERED LUMEN FOR HIGH-OUTPUT DRIVER SETTINGS

Data based on fixture with 3500K Color Temperature at listed drive currents powered by REVI-Drive-4-384W.

Fixture	Trim	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	600*	21	2953	40°	140.60
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	600*	21	2885	50°	137.39
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	600*	21	2968	60°	1414.33
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	600*	21	2832	70°	134.87
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	700*	25	3414	40°	136.56
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	700*	25	3336	50°	133.44
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	700*	25	3432	60°	137.27
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	700*	25	3275	70°	130.99
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	800	29	3875	40°	133.63
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	800	29	3787	50°	130.58
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	800	29	3896	60°	134.33
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	800	29	3717	70°	128.19
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	1000	36	4798	40°	133.28
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	1000	36	4688	50°	130.23
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	1000	36	4823	60°	133.97
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	1000	36	4603	70°	127.85
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	1200	44	5721	40°	130.02
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	1200	44	5590	50°	127.04
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	1200	44	5751	60°	130.69
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	1200	44	5488	70°	124.72
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	1750	65	7935	40°	122.08
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	1750	65	7754	50°	119.29
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	1750	65	7977	60°	122.72
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	1750	65	7612	70°	117.11
REVI-XLC-6SCALCDB79VB35KM40	6SCAHSCLPF	2100	80	9227	40°	115.34
REVI-XLC-6SCALCDB79VB35KM50	6SCAHSCLPF	2100	80	9016	50°	112.70
REVI-XLC-6SCALCDB79VB35KM60	6SCAHSCLPF	2100	80	9275	60°	115.94
REVI-XLC-6SCALCDB79VB35KM70	6SCAHSCLPF	2100	80	8851	70°	110.64

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L3 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	200	7	899	65°	128.39
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	300	10	1143	65°	114.34
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	350	12	1470	65°	122.54
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	400	14	1798	65°	128.39
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	500	17	2205	65°	129.72
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	600*	21	2614	65°	124.47
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	700*	25	3022	65°	120.90
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	800	29	3431	65°	118.31
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	1000	36	4247	65°	117.98
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	1200	44	5065	65°	115.10
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	1750	65	7025	65°	108.08
	REVI-XLC-6SCALCDB79VB35L	6SCAL3SCLPF	C73 PRISMATIC	2100	80	8168	65°	102.11

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L5 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	200	7	813	65°	116.21
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	300	10	1035	65°	103.48
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	350	12	1331	65°	110.91
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	400	14	1627	65°	116.21
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	500	17	1996	65°	117.40
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	600*	21	2366	65°	112.65
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	700*	25	2736	65°	109.42
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	800	29	3105	65°	107.08
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	1000	36	3844	65°	106.78
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	1200	44	4584	65°	104.18
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	FROSTED GLASS	1750	65	6358	65°	97.82
	REVI-XLC-6SCALCDB79VB35L	6SCAL5SCLPF	ROSTED GLASS	2100	80	7393	65°	92.41

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L6 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	200	7	853	68°	121.87
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	300	10	1085	68°	108.53
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	350	12	1396	68°	116.32
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	400	14	1706	68°	121.87
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	500	17	2093	68°	123.13
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	600*	21	2481	68°	118.15
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	700*	25	2869	68°	114.76
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	800	29	3257	68°	112.30
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	1000	36	4032	68°	111.99
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	1200	44	4807	68°	109.26
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	1750	65	6668	68°	102.59
	REVI-XLC-6SCALCDB79VB35L	6SCAL6SCLPF	FROSTED ACRYLIC	2100	80	7754	68°	96.92

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L7 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	200	7	942	63°	134.63
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	300	10	1199	63°	119.89
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	350	12	1542	63°	128.49
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	400	14	1885	63°	134.63
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	500	17	2312	63°	136.02
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	600*	21	2741	63°	130.51
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	700*	25	3169	63°	126.77
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	800	29	3598	63°	124.06
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1000	36	4454	63°	123.71
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1200	44	5311	63°	120.69
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	1750	65	7366	63°	113.33
	REVI-XLC-6SCALCDB79VB35L	6SCAL7SCLPF	SOLITE MICRO-PRISMATIC GLASS	2100	80	8565	63°	107.07

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L8 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	200	7	922	63°	131.65
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	300	10	1172	63°	117.24
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	350	12	1508	63°	125.65
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	400	14	1843	63°	131.65
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	500	17	2261	63°	133.01
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	600*	21	2680	63°	127.63
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	700*	25	3099	63°	123.97
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	800	29	3518	63°	121.31
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	1000	36	4355	63°	120.98
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	1200	44	5193	63°	118.03
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	1750	65	7203	63°	110.82
	REVI-XLC-6SCALCDB79VB35L	6SCAL8SCLPF	CLEAR POLY CARBONATE	2100	80	8376	63°	104.70

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for L9 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	200	7	924	63°	131.94
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	300	10	1175	63°	117.49
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	350	12	1511	63°	125.92
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	400	14	1847	63°	131.94
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	500	17	2266	63°	133.30
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	600*	21	2686	63°	127.90
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	700*	25	3106	63°	124.23
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	800	29	3526	63°	121.58
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	1000	36	4365	63°	121.24
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	1200	44	5204	63°	118.28
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	1750	65	7219	63°	111.06
	REVI-XLC-6SCALCDB79VB35L	6SCAL9SCLPF	CLEAR TEMPERED GLASS	2100	80	8394	63°	104.92

Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

(Delivered Lumen data continued on next page)

DELIVERED LUMEN DATA

Data based on fixture with 3500K Color Temperature at Specific Drive Currents for LW6 Lens

Lumen Level	Fixture	Trim	Lens	Current (mA)	Wattage	Delivered Lumens	Beam Distribution	LPW
REVI-Drive-4-100W REVI-Drive-12-250W	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	200	7	863	65°H X 65°V	123.29
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	300	10	1098	65°H X 65°V	109.79
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	350	12	1412	65°H X 65°V	117.67
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	400	14	1726	65°H X 65°V	123.29
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	500	17	2118	65°H X 65°V	124.56
REVI-DriveXL-4-384W	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	600*	21	2510	65°H X 65°V	119.52
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	700*	25	2902	65°H X 65°V	116.09
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	800	29	3295	65°H X 65°V	113.61
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	1000	36	4079	65°H X 65°V	113.29
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	1200	44	4863	65°H X 65°V	110.53
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	1750	65	6746	65°H X 65°V	103.78
	REVI-XLC-6SCALCDB79VB35L	6SCALW6SCLPF	LINEAR SPREAD LENS	2100	80	7844	65°H X 65°V	98.05


Scaling factors for other color temperatures: 2700K = 0.92; 3000K = 0.97; 4000K = 1.01; 5000K=1.04

Scaling factor for 90 CRI=0.83 [90 CRI is standard]

Scaling factor for 95+ CRI = 0.68

*Can be driven with REVI-Drive-12-250W - Only 9 fixtures total (3 fixtures per bank of 4 channel outputs)

Typical Layout for Low Voltage LED Lighting Fixtures with Remote Driver Platform

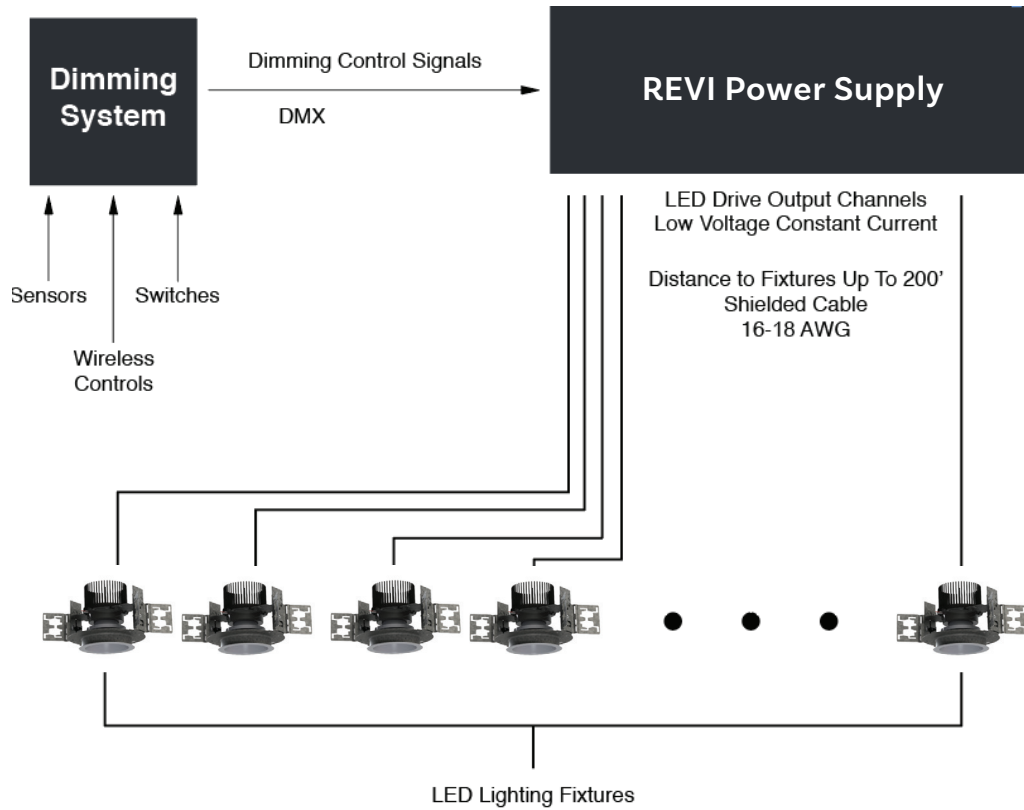

OPTIONS AND ACCESSORIES

REFLECTOR FINISHES



Clear
Soft Specular "SCL"




Haze
Diffused "HAZ"

Our standard reflector finish is soft Haze Diffused (HAZ) with a polished self-flange (PF). These are offered in both a soft specular and a diffused/matte finish. Specified suffix of desired finish.

Example: 4VLEDSCLPF

For white painted flange omit PF.

STANDARD HANGER BARS

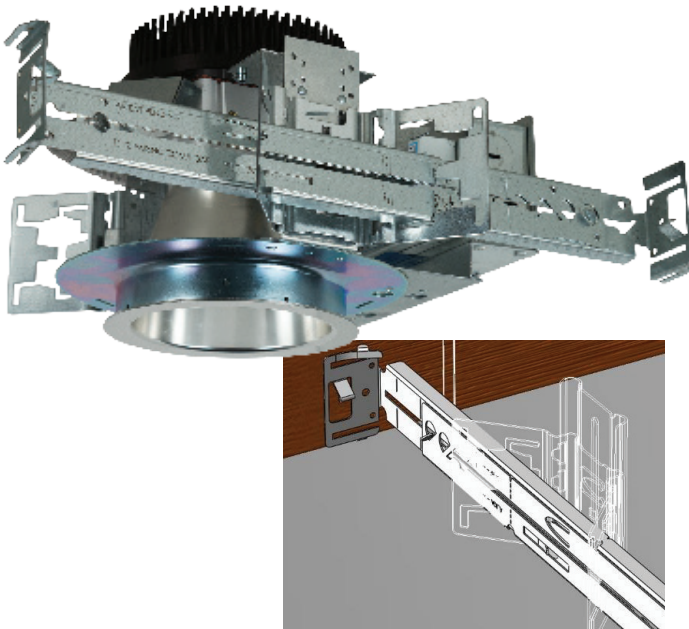

Interlocking L-Bar hanger bars are now standard with this lighting fixture. Installer friendly features include:

- L-Bars are fabricated from identical L-shaped cross sections that form a sturdy 1/2" by 1-1/2" C-channel profile for superior rigidity.
- Pre-marked with spacing locations for 24" T-bar; 16" and 24" joist ceilings (wood and metal)
- Extension locks with an easy-to-use integral twist tab. No separate fastener.
- Interlocking and expandable to 24". Can be increased to 36" or 48" with the use of additional bars. For more details, please contact your sales engineer.
- Allows for offset mounting.
- Integral and barbed nail spike for wood joist ceilings.
- Fits into the C-channel notches on our butterfly mounting bracket.