## Environmental Lights<sup>™</sup>

# **REVI 3-inch Downlights**

Monochrome

## SYSTEM DESCRIPTION

The Environmental Lights 3-inch Remote Voltage Illumination (REVI) downlight system is a low-voltage, Class 2 constant current solution designed to give integrators ultimate control and flexibility over lighting. The 3-inch REVI downlight system allows lighting designers and integrators to select their brightness level (Light Engine), Optic, Media Insert, Baffle, Trim, and Mounting Frame for a comprehensive downlighting solution. All components are sold separately but will be shipped as one pre-assembled fixture.

**Ideal Application:** Residential and Architectural downlighting up to 1560 lumens including new construction and retrofit installations.

## **TECHNICAL SPECIFICATIONS**

Light Engine	REVI-LE1-9V	REVI-LE1-18V	REVI-LE1-36V	
Brightness	452 lm	911 lm	1560 lm	
Drive Current	500 mA	500 mA	500 mA	
Forward Voltage	9 Vdc	18 Vdc	36 Vdc	
Power Draw	4.5 Watts	9 Watts	18 Watts	
Color Rendering Index	90+	90+	90+	
Linkable Features 4 per Class 2 Channel		2	1	

### Parts A-F make up the Remove Voltage Illumination (REVI) Downlight System.

## A LIGHT ENGINES

REVI LE1 Light Engine 9 Volts [4.5 W, 500 mA] (2700K, 3000K) REVI-LE1-9V-27K, REVI-LE1-9V-30K

REVI LE1 Light Engine 18 Volts [9 W, 500 mA] (2700K, 3000K) REVI-LE1-18V-27K, REVI-LE1-18V-30K

REVI LE1 Light Engine 36 Volts [18 W, 500 mA] (2700K, 3000K) REVI-LE1-36V-27K, REVI-LE1-36V-30K

#### OPTICS



## REVI LE1 13° Narrow Lens\*

REVI-LE1-L-13D \*Can be paired with REVI LE1 60° Flood Insert to create a 60° beam angle.

REVI LE1 18° Medium Lens REVI-LE1-L-18D

REVI LE1 31° Wide Lens REVI-LE1-L-31D

#### MEDIA INSERTS [optional]



### REVI LE1 60° Flood Insert

REVI-LE1-IN-FL \*In order to function as intended, this insert pairs with REVI LE113° Narrow Lens to create a 60° beam angle.

#### REVI LE1 Clear Glass Insert REVI-LE1-IN-CG

REVI LE1 Acrylic Diffuser Insert REVI-LE1-IN-AD

REVI LE1 Prismatic Glass Insert REVI-LE1-IN-PG

REVI LE1 Honeycomb Insert REVI-LE1-IN-HC

REVI LE1 Striped Glass Insert REVI-LE1-IN-SG

### BAFFLES







REVI 3-inch LE1 Baffle, Square Fixed REVI-LE1-B3-SF-W

**REVI 3-inch LE1 Baffle, Round Wall Wash** 

REVI 3-inch LE1 Baffle, Square Adjustable REVI-LE1-B3-SA-W

REVI-I E1-B3-RA-W

REVI-LE1-B3-RW-W

REVI 3-inch LE1 Baffle, Square Wall Wash REVI-LE1-B3-SW-W

### TRIMS



REVI 3-inch LE1 Trim, Round REVI-LE1-T3-R-W

REVI 3-inch LE1 Trimless Plate, Round REVI-LE1-TL3-R



REVI 3-inch LE1 Trim, Square REVI-LE1-T3-S-W

REVI 3-inch LE1 Trimless Plate, Square REVI-LE1-TL3-S



**REVI 3-inch LE1 Trim, Square Trim for Round Baffle** REVI-LE1-T3-SR-W



REVI 3-inch LE1 Trim, Double Square REVI-LE1-T3-2S-W

REVI 3-inch LE1 Trim, Triple Square REVI-LE1-T3-3S-W

#### MOUNTING FRAMES



IC Rated Box, Round REVI-IC3-R

IC Rated Box, Square REVI-IC3-S1

IC Rated Box, Square Double REVI-IC3-S2

IC Rated Box, Square Triple REVI-IC3-S3



Flat Mounting Frame, Round REVI-FF3-R

Flat Mounting Frame, Square REVI-FF3-S1

Flat Mounting Frame, Square Double REVI-FF3-S2

Flat Mounting Frame, Square Triple REVI-FF3-S3



US LISTED

## Environmental Lights<sup>™</sup>

## REVI 3-inch Downlights

Monochrome

## FIXTURE OPTIONS

**Light Engines -** Low [452 lm], Medium [911 lm], High [1560 lm], Available CCT: 2700K & 3000K

**Optics -** Narrow [13°] , Medium [18°], Wide [31°]

**Media Inserts -** 60° Flood, Acrylic Diffuser, Clear Glass, Striped Glass, Prismatic Glass, Honeycomb

**Baffles -** Round Fixed, Round Adjustable, Round Wall Wash, Square Fixed, Square Adjustable, Square Wall Wash

**Trims** - Single Round, Single Square, Single Trimless Round, Single Square for Round Baffle, Single Trimless Square, Double Square, Triple Square

**Mounting -** IC Rated Box Round, Flat Frame Round, IC Rated Box Square, Flat Frame Square

## REGULATORY

- UL ListedClass 2
- Can be used to comply with CA Title-24 JA8
- RoHS
- IP44 Rated
- IC Rated (9V & 18V Fixed and 9V & 18V Wall Wash)\*

\*Always adhere to local installation standards and guidelines

## ASSEMBLY BUILDER

Example: REVI-LE1-9V-27K-13D-AD-RF-T3-R = 9 Volt/4.5 Watt Light Engine, 2700K CCT, 13 Degree Lens, Acrylic Diffuser Media Insert, Round Fixed Baffle, Round Trim (all white). Note: To create a 60 degree beam of light, you must list the 13 Degree Lens + the 60 degree Flood Insert when using the assembly builder.

REVI-LE1						
Fixture Series	Light Engine	Color Temperature	Lens	Media Insert	Baffle	Trim
	9V = 9V (500 mA, 4.5W)	27K = 2700 K	13D = 13 Degrees	FL = 60 Degree Flood Insert	RF = Round Fixed	T3-R = Round Trim
	18V = 18V (500 mA, 9W)	30K = 3000 K	18D = 18 Degrees	AD = Acrylic Diffuser	RA = Round Adjustable	TL3-R = Round Trimless
	36V = 36V (500 mA, 18W)		31D = 31 Degrees	SG = Striped Glass	RW = Round Wall Wash	T3-S = Square Trim
			WW= Wall Wash Baffle Only	PG = Prismatic Glass	SF = Square Fixed	TL3-S = Square Trimless
				CG = Clear Glass	SA = Square Adjustable	T3-SR-W = Square Trim for Round Baffle
				HC = Honeycomb	SW = Square Wall Wash	Square Inm for Round Barne
				OP = Open [No Insert]		T3-2S = Double Square Trim
						T3-3S = Triple Square Trim

### SYSTEM CHARACTERISTICS

#### LIGHT ENGINES



REVI LE1 Light Engine 9 V 4.5 Watts [2700K & 3000K] REVI-LE1-9V-27K, REVI-LE1-9V-30K

A 9 Volt, 4.5 Watt compact light engine is designed and optimized for lower output downlighting applications. Ideal for recessed ceiling lighting where an output of up to 400 lumens is required.

### OPTICS



#### **REVI LE1 13° Narrow Lens** REVI-LE1-L-13D

A narrow flood lens that delivers a precision-targeted beam of light. It can be paired with REVI LE1 60° to create a 60° beam angle.





#### REVI LE1 60° Flood Insert **REVI-LE1-IN-FL**

In order to function as intended, this insert pairs with REVI LE1 13° Narrow Lens to create a 60° beam angle.

#### **REVI LE1 Striped Glass Insert REVI-LE1-IN-SG**

Designed to elongate the light pattern at the lens surface when a wider spread or wash is needed

### BAFFLES / ROUND & SQUARE



#### **REVI 3-inch LE1 Baffle, Round Fixed** REVI-LE1-B3-RF-W

A fixed-position round trim option for your lighting fixture.

Color - White

### **REVI 3-inch LE1 Baffle, Square Fixed**

REVI-LE1-B3-SF-W A fixed-position square trim option for your lighting fixture.

Color - White



#### REVI LE1 Light Engine 18 V 9 Watts [2700K & 3000K] REVI1-LE1-18V-27K, REVI1-LE1-18V-30K

A 18 Volt, 9 Watt compact light engine is designed and optimized for medium output downlighting applications. Ideal for recessed ceiling lighting where an output of up to 850 lumens is required.



**REVI LE1 Clear Glass Insert** 

**REVI-LE1-IN-CG** 

**REVI-LE1-IN-AD** 



A spot lens that delivers a medium-sized beam of light that brings attention to areas that need to be highlighted.

Intended to provide a sheen surface without

obstructing the light dispersion from the lens.

Engineered to soften the light output at the

**REVI LE1 Acrylic Diffuser Insert** 

lens for even distribution of light.



#### **REVI LE1 Prismatic Glass Insert REVI-LE1-IN-PG**

**REVI LE1 Light Engine 36 V** 

18 Watts [2700K & 3000K]

1,500 lumens is required.

**REVI LE1 31° Wide Lens** 

REVI-LE1-L-31D

REVI1-LE1-36V-27K, REVI1-LE1-36V-30K

A 36 Volt, 18 Watt compact light engine is

downlighting applications. IIdeal for recessed

designed and optimized for high output

ceiling lighting where an output of up to

A flood lens that delivers a wide beam of

light to provide full illumination for a space.

Designed with a hatch pattern to spread the light at the lens for maximum dispersion.



#### **REVI LE1 Honeycomb Insert REVI-LE1-IN-HC**

Engineered to minimize off-angle glare with the intent of eliminating any orb effect around the fixture.



# **REVI 3-inch LE1 Baffle, Round Adjustable**

A round trim option that enables adjustment of the angle of light.



## **REVI 3-inch LE1 Baffle, Square Adjustable**

REVI-LE1-B3-SA-W A square trim option that enables adjustment of the angle of light.

Color - White

#### REVI 3-inch LE1 Baffle, Round Wall Wash REVI-LE1-B3-RW-W

A round fixed-position, preconfigured option that provides an even spread of light on a wall.

Color - White

#### **REVI 3-inch LE1 Baffle, Square Wall Wash** REVI-LE1-B3-SW-W

A square fixed-position, preconfigured option that provides an even spread of light on a wall.

Color - White


















## **REVI 3-inch Downlights**


Monochrome

#### TRIMS / ROUND & SQUARE

Environmental




Lights

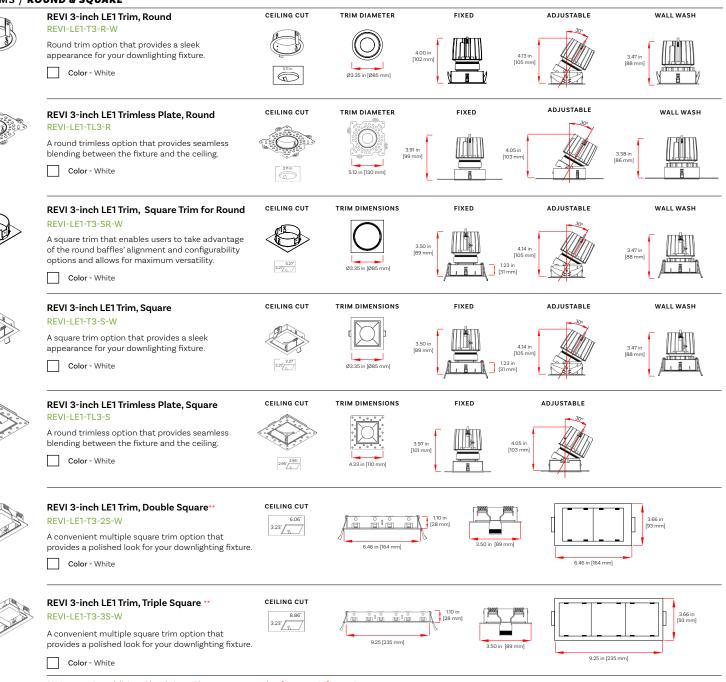

\*\*May require additional lead time. Please contact sales for more information.




MOUNTING FRAMES / ROUND & SQUARE




## REVI 3-inch IC Rated Box, Round


Recess-mounted frame for safe and easy installation of your lighting fixture. Engineered to be compatible with round baffle and trim options.



TOP VIEW

5.0 in [127 mm]





R

Æ


. . .

#### REVI 3-inch IC Rated Box, Square REVI-IC3-S1

REVI 3-inch IC Rated Box, Square Double\*\* REVI-IC3-S2

REVI 3-inch IC Rated Box, Square Triple\*\* REVI-IC3-S3

Recess-mounted frame for safe and easy installation of your lighting fixture. Engineered to be compatible with square baffle and trim options.









9.60 in [230 mm]

13.3 in [337 mm]



#### REVI 3-inch Flat Mounting Frame, Round REVI-FF3-R

A thin mounting frame that allows your fixture to be built directly into the ceiling. Engineered to be compatible with round baffle and trim options.








## REVI 3-inch Flat Mounting Frame, Square

REVI 3-inch IC Rated Box, Square Double\*\*


REVI-FF3-S2

#### REVI 3-inch IC Rated Box, Square Triple\*\* REVI-FF3-S3

A thin mounting frame that allows your fixture to be built directly into the ceiling. Engineered to be compatible with square baffle and trim options.







\*\*May require additional lead time. Please contact sales for more information.