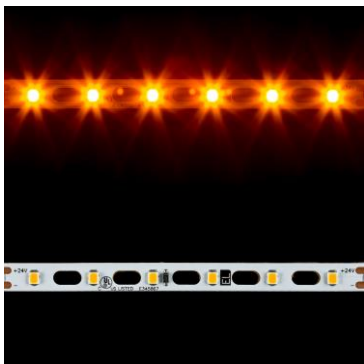
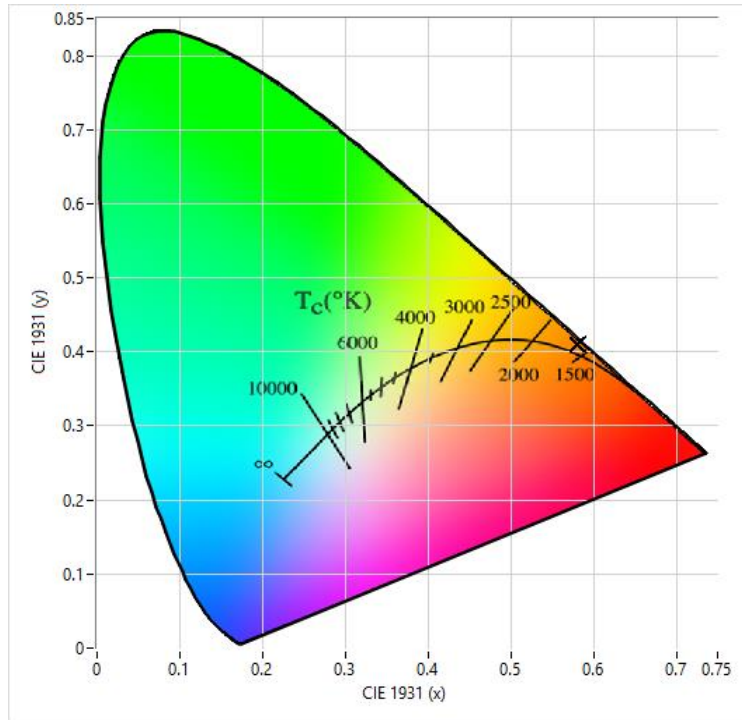

Integrating Sphere Test Report

HyperFlex 2835 LED Strip Light - Amber - 60/m - CurrentControl - 10m Reel
Amber-CC2835HF-60-8-10m



Amber-CC2835HF-60-8-10m

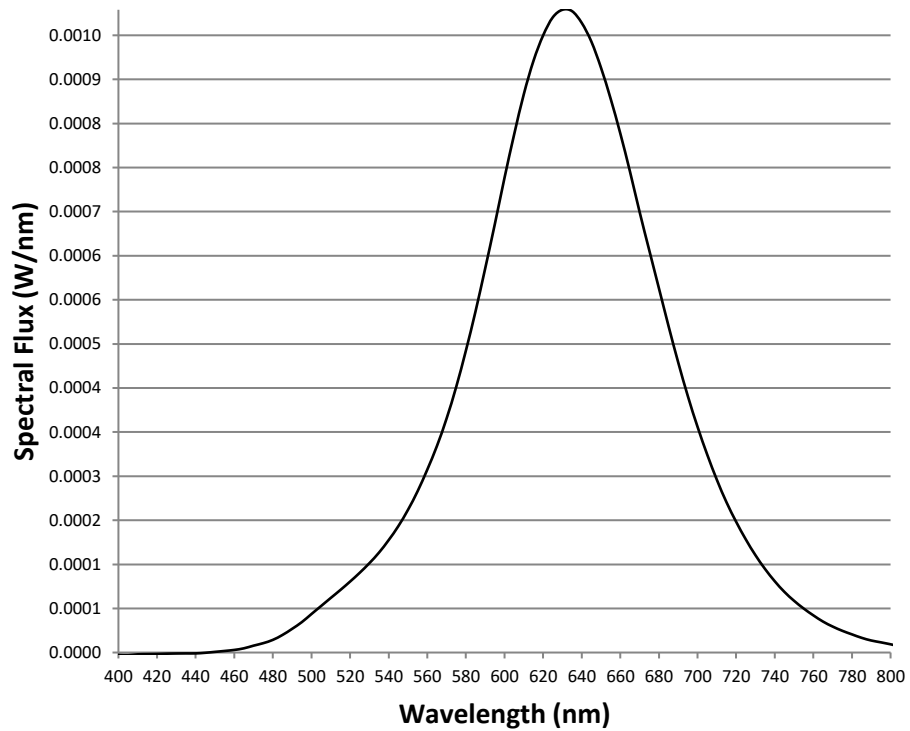


Photometric Test Results

- Total Radiant Flux* (W): 0.121178
- Total Luminous Flux* (lm): 28.15029
- CIE 1931 Tristimulus x: 0.580232
- CIE 1931 Tristimulus y: 0.409336
- CIE 1931 Tristimulus Y: 0.041219
- CIE 1976 Chroma u': 0.343761
- CIE 1976 Chroma v': 0.545654

*Total radiant and luminous flux are per test length, listed on page 2, not characteristic of the entire reel.

Spectral Power Distribution



Spectral Response Characteristics

Peak Wavelength (nm): 631.58
Center Wavelength (nm): 634.12
Full Width (nm): 102.64
Centroid Wavelength (nm): 633.89
Dominant Wavelength (nm): 592
Purity: 97.04214
Voltage (V): 24

Date of Test: 12/5/18
Length of Test Sample: 100mm
Measurement Geometry: 2pi

Environmental Lights
888-880-1800