



7826 East Evans Road
Scottsdale, AZ 85260
480-991-9260

Photometric Indoor Test Report

Relevant Standards
IES LM-79-2008
ANSI C82.77-2002

Prepared For
Environmental Lights
11235 W. Bernardo Court, Suite 102
San Diego, CA 92127

Catalog Number
dl-module-5050-3
Project Number
10345709
Test Number
33102

Test Date

2014-06-23

Prepared By

Handwritten signature of Dennis Boyles in black ink.

Dennis Boyles, Technician

Approved By

Handwritten signature of Jim Domigan in black ink.

Jim Domigan, Laboratory Team Leader


The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.



7826 East Evans Road
Scottsdale, AZ 85260
480-991-9260

Luminaire Description: LED Strip Light
Catalog Number: dl-module-5050-3
Lamp: LED Array
Ballast/Driver: One Mean Well SP-240-12 Driver

Luminaire

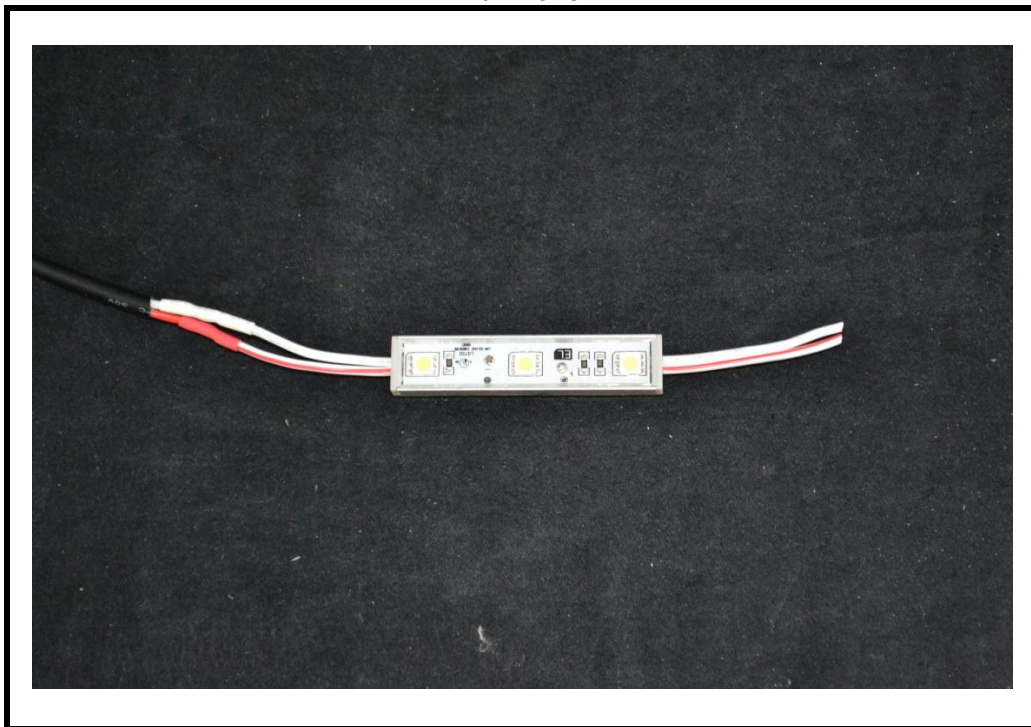


Test Conditions

Test Temperature: 24.8 °C
Voltage: 12.0 VDC



7826 East Evans Road
 Scottsdale, AZ 85260
 480-991-9260

INTENSITY (CANDLEPOWER) SUMMARY OUTPUT LUMENS

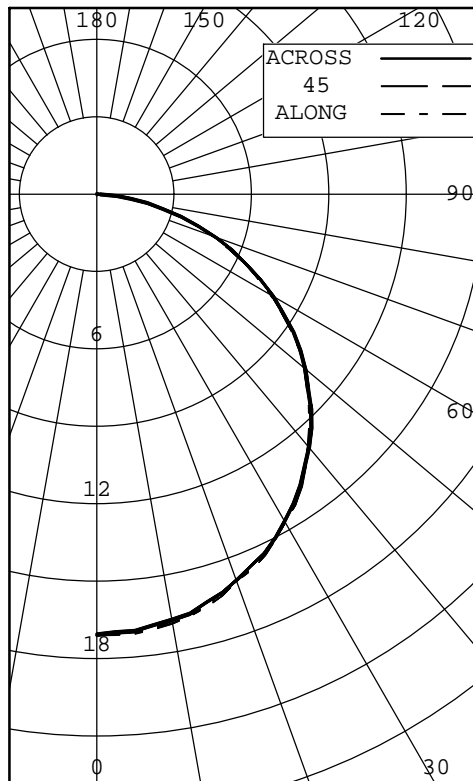

ANGLE	ALONG	22.5	45	67.5	ACROSS	OUTPUT LUMENS
0	17	17	17	17	17	
5	17	17	17	17	17	2
10	17	17	17	17	17	
15	17	17	17	16	16	5
20	16	16	16	16	16	
25	15	15	15	15	15	7
30	15	15	15	15	15	
35	14	14	14	14	14	9
40	13	13	13	13	13	
45	12	12	12	12	12	9
50	11	10	11	10	11	
55	9	9	9	9	9	8
60	8	8	8	8	8	
65	6	6	6	6	6	6
70	5	5	5	5	5	
75	3	3	3	3	3	4
80	2	2	2	2	2	
85	1	1	1	1	1	1
90	0	0	0	0	0	

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LUMINAIRE
0-30	13	26.70
0-40	22	43.88
0-60	39	78.33
0-90	50	100.00
40-90	28	56.12
60-90	11	21.67
90-180	0	0.00
0-180	50	100.00

*** THIS IS AN ABSOLUTE TEST ***

LUMINOUS LENGTH: 3.250 INS
 WIDTH: 0.250 INS

LUMINANCE SUMMARY CD./SQ.M.

S/MH: 1.3
 SC: 1.3

ANGLE	ALONG	45	ACROSS
45	31430	31956	31821
55	30598	30715	31049
65	28438	28311	28999
75	24692	24721	25156
85	17511	17556	17578

TESTED IN ACCORDANCE WITH IES PROCEDURES.



INTENSITY (CANDLEPOWER) DATA
IN 2.5 DEGREE STEPS

ANGLE	PLANE						OUTPUT LUMENS
	ALONG	22.5	45	67.5	ACROSS	AVERAGE	
0.0	17	17	17	17	17	17	
2.5	17	17	17	17	17	17	
5.0	17	17	17	17	17	17	2
7.5	17	17	17	17	17	17	
10.0	17	17	17	17	17	17	
12.5	17	17	17	17	17	17	
15.0	17	17	17	16	16	16	5
17.5	16	16	16	16	16	16	
20.0	16	16	16	16	16	16	
22.5	16	16	16	16	16	16	
25.0	15	15	15	15	15	15	7
27.5	15	15	15	15	15	15	
30.0	15	15	15	15	15	15	
32.5	14	14	14	14	14	14	
35.0	14	14	14	14	14	14	9
37.5	13	13	13	13	13	13	
40.0	13	13	13	13	13	13	
42.5	12	12	12	12	12	12	
45.0	12	12	12	12	12	12	9
47.5	11	11	11	11	11	11	
50.0	11	10	11	10	11	11	
52.5	10	10	10	10	10	10	
55.0	9	9	9	9	9	9	8
57.5	8	9	9	9	9	9	
60.0	8	8	8	8	8	8	
62.5	7	7	7	7	7	7	
65.0	6	6	6	6	6	6	6
67.5	6	6	6	6	6	6	
70.0	5	5	5	5	5	5	
72.5	4	4	4	4	4	4	
75.0	3	3	3	3	3	3	4
77.5	3	3	3	3	3	3	
80.0	2	2	2	2	2	2	
82.5	1	1	1	1	1	1	
85.0	1	1	1	1	1	1	1
87.5	0	0	0	0	0	0	
90.0	0	0	0	0	0	0	



7826 East Evans Road
 Scottsdale, AZ 85260
 480-991-9260

COEFFICIENTS OF UTILIZATION

ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE = .20

CC WALL	90				80				70				50				30				10				0
	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																									
0	1.221	1.221	1.221	1.221	1.191	1.191	1.191	1.191	1.161	1.161	1.161	1.161	1.111	1.111	1.111	1.061	1.061	1.061	1.021	1.021	1.021	1.000	1.000	1.000	1.000
1	1.131	1.081	1.041	1.011	1.101	1.061	1.020	0.991	1.081	1.041	1.010	0.971	1.000	0.970	0.941	0.960	0.940	0.921	0.920	0.900	0.891	0.891	0.891	0.891	0.871
2	1.030	0.960	0.890	0.831	1.010	0.940	0.880	0.821	0.990	0.920	0.860	0.811	0.880	0.840	0.791	0.850	0.810	0.781	0.820	0.790	0.761	0.761	0.761	0.761	0.741
3	0.950	0.840	0.760	0.701	0.920	0.830	0.750	0.691	0.900	0.810	0.740	0.691	0.780	0.720	0.681	0.760	0.710	0.661	0.730	0.690	0.651	0.651	0.651	0.651	0.631
4	0.870	0.760	0.670	0.601	0.850	0.740	0.660	0.601	0.830	0.730	0.660	0.591	0.710	0.640	0.591	0.680	0.630	0.581	0.660	0.610	0.571	0.571	0.571	0.571	0.551
5	0.810	0.680	0.590	0.521	0.790	0.670	0.580	0.521	0.760	0.650	0.570	0.511	0.630	0.560	0.511	0.610	0.550	0.501	0.590	0.540	0.501	0.501	0.501	0.501	0.481
6	0.740	0.610	0.520	0.451	0.720	0.600	0.510	0.451	0.700	0.590	0.510	0.451	0.570	0.500	0.441	0.550	0.490	0.441	0.540	0.480	0.431	0.431	0.431	0.431	0.421
7	0.680	0.540	0.450	0.401	0.670	0.530	0.450	0.391	0.650	0.530	0.450	0.391	0.510	0.440	0.391	0.500	0.430	0.381	0.480	0.420	0.381	0.381	0.381	0.381	0.361
8	0.630	0.490	0.410	0.351	0.620	0.480	0.400	0.351	0.600	0.480	0.400	0.341	0.460	0.390	0.341	0.450	0.390	0.341	0.440	0.380	0.341	0.341	0.341	0.341	0.321
9	0.590	0.450	0.360	0.301	0.570	0.440	0.360	0.301	0.560	0.440	0.360	0.301	0.420	0.350	0.301	0.410	0.350	0.301	0.400	0.340	0.301	0.301	0.301	0.301	0.281
10	0.540	0.410	0.320	0.271	0.530	0.400	0.320	0.271	0.520	0.400	0.320	0.271	0.390	0.320	0.271	0.380	0.310	0.271	0.370	0.310	0.261	0.261	0.261	0.261	0.251

THE ABOVE COEFFICIENTS HAVE BEEN CALCULATED BASED ON LUMINAIRE LUMENS
 BECAUSE IN AN ABSOLUTE TEST THE BARE LAMP LUMENS ARE UNKNOWN.
 LIGHTING DESIGN CALCULATIONS MADE USING THESE COEFFICIENTS SHOULD
 THEREFORE USE THE LUMINAIRE LUMENS IN THE CALCULATION FORMULA

LABORATORY RESULTS MAY NOT BE REPRESENTATIVE OF FIELD PERFORMANCE.
 BALLAST AND FIELD FACTORS HAVE NOT BEEN APPLIED.

TEST DISTANCE EXCEEDS FIVE TIMES THE GREATEST
 LUMINOUS OPENING OF LUMINAIRE.



7826 East Evans Road
Scottsdale, AZ 85260
480-991-9260

All testing was conducted in accordance with LM-79-08,

Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products as published by the Illuminating Engineering Society of North America (IESNA).

The condition of the item tested was new. Stabilization time before testing meets the stabilization requirements of LM-79-08.

The test results (luminous distribution and flux) were obtained by using a Lighting Sciences series 6000 Type C Moving Mirror Goniophotometer

- The photometric reference standard used is a set of three incandescent luminous intensity standard lamps calibrated and traceable to the U.S. National Institute of Standards and Technology.

Power measurements were obtained with a Xitron 2801 power analyzer.

Ambient temperature during testing was $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured using an Omega model DP460.

Calibration certificates are on file at the laboratory

The results in this report apply to the test sample(s) mentioned in this report at the time of the testing period only and are not to be used to indicate applicability to other similar products.