

ILUMINARC®

ILUMIPANEL 40 IP OPTIC 30 RGB

Item Number: 01620521

Client: _____


Project: _____

Date: _____ Type: _____


Ilumipanel 40 IP Optic 30 RGB Photometry

■ Beam Angle: 22°

■ Field Angle: 38°

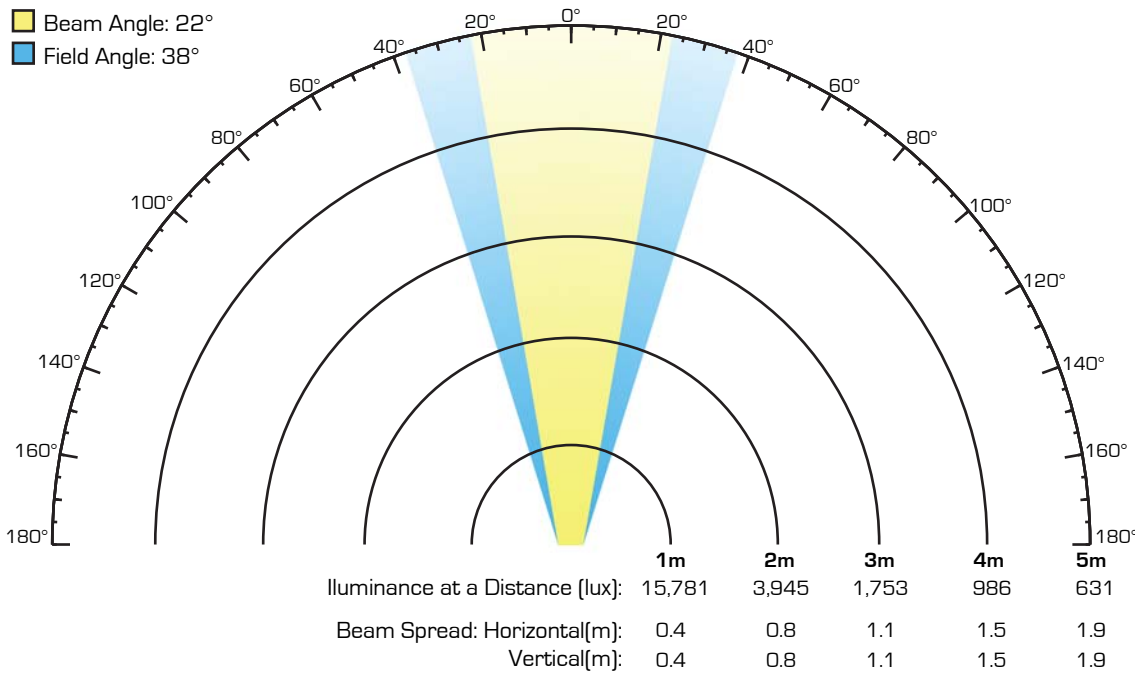

Ilumipanel 40 IP Optic 30 RGB Typical Installation

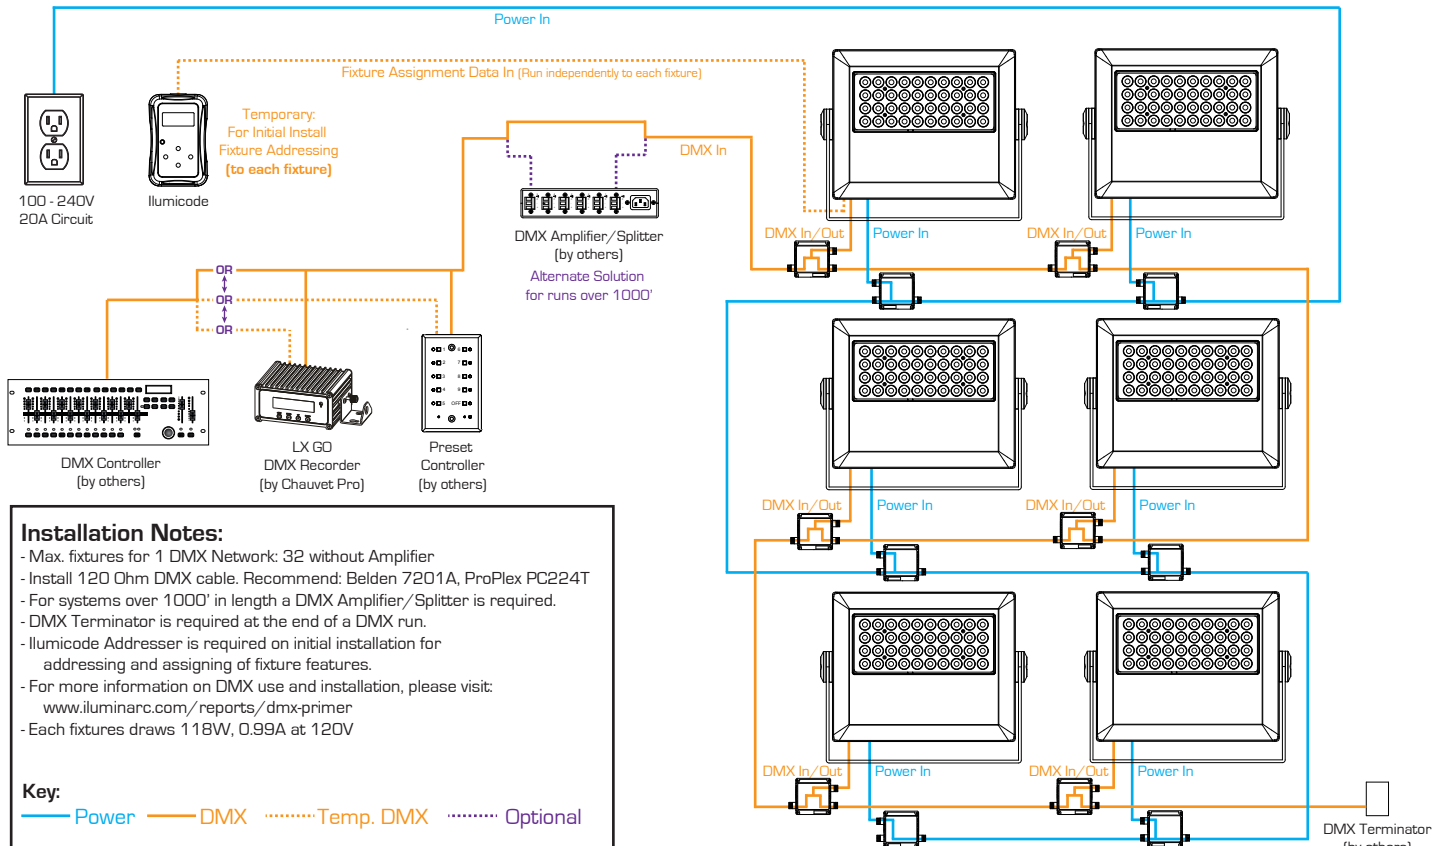

Installation Notes:

- Max. fixtures for 1 DMX Network: 32 without Amplifier
- Install 120 Ohm DMX cable. Recommend: Belden 7201A, ProPlex PC224T
- For systems over 1000' in length a DMX Amplifier/ Splitter is required.
- DMX Terminator is required at the end of a DMX run.
- Ilumicode Addresser is required on initial installation for addressing and assigning of fixture features.
- For more information on DMX use and installation, please visit: www.iluminarc.com/reports/dmx-primer
- Each fixtures draws 118W, 0.99A at 120V