


EcoFlex LED Neon - RGB

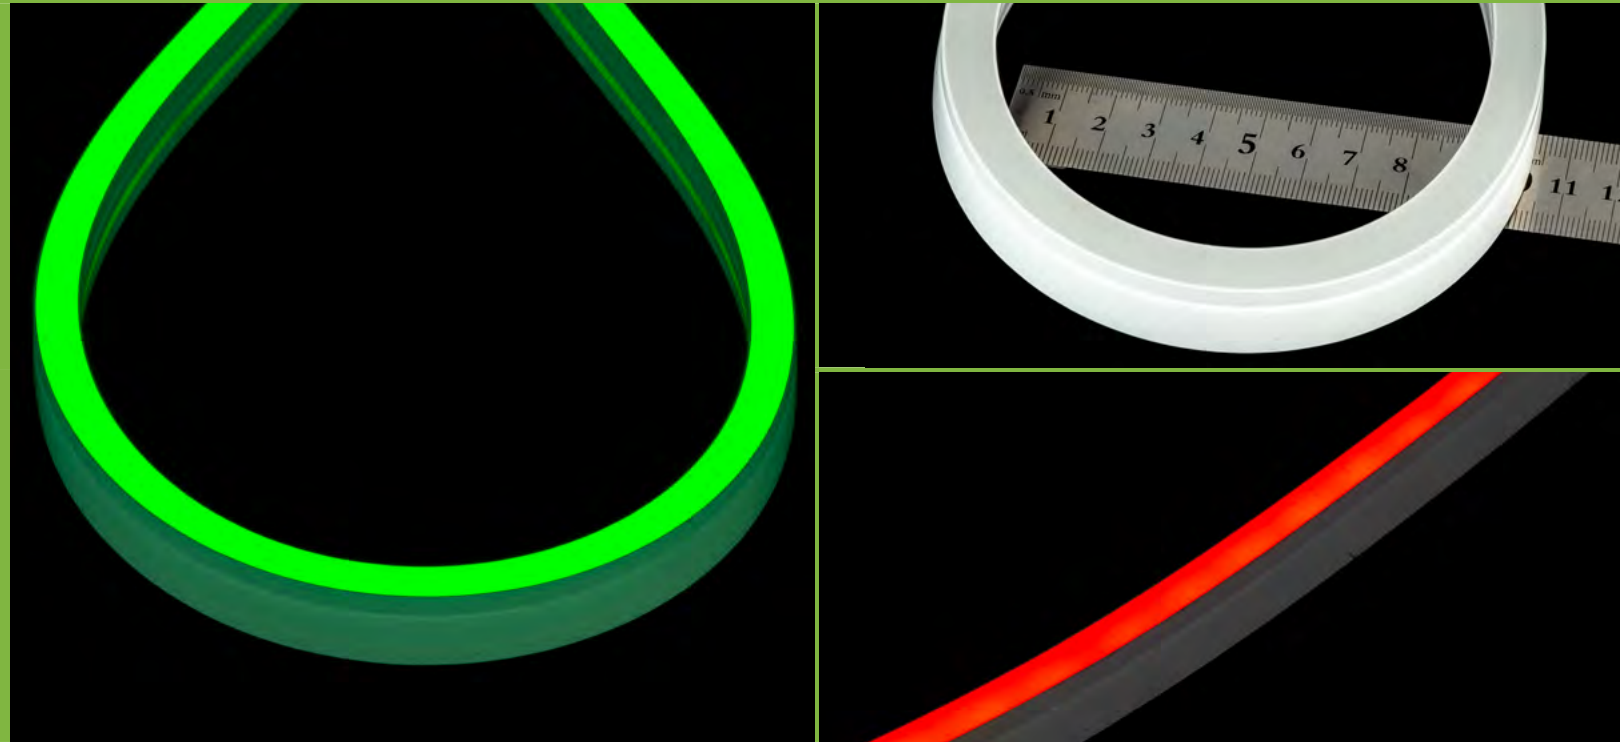

Adaptable and Flexible

RGB EcoFlex LED Neon from Environmental Lights is one of the most flexible and cost-effective members of our line of LED Neon products. It allows you to go beyond the creative potential of traditional glass neon to achieve dynamic effects and custom colors.

With 10-meter run lengths powered from one end, RGB EcoFlex Neon is UL Listed and saves time and money on installation. It runs on 24 Volts DC and its silicone casing provides protection and excellent diffusion for a hotspot-free appearance. RGB EcoFlex LED Neon is incredibly flexible and has a minimum lateral bending radius of 40mm. It is low maintenance and easy to control.

- Flexible silicone housing
- UV resistant and low maintenance
- IP65 rated with factory-sealed ends
- Up to 10-meter run lengths



EcoFlex LED Neon - RGB

Specifications

Output	EcoFlex LED Neon - RGB - 10m
	LN-ECO-RGB
Beam Angle	120
Brightness (lm/m)	36/103/18
Light Color	RGB
Wave Length	630/520/463
Electrical	
Voltage (DC)	24
Power (W/m)	9.60
Density (LEDs/m)	60
LED Node Size	5050
Physical	
Material	Silicone
Width (mm)	14
Height (mm)	20.5
Cutting Increment (mm)	100
IP Rating	IP65
Rating	UL, RoHS
Warranty	3 years limited