
## UltraSlim LED Neon



## Our Thinnest and Most Flexible LED Neon

UltraSlim LED Neon takes the hotspot-free appearance of traditional glass neon, combines it with the advantages of LED lighting and reduces the size into a narrow profile. It is remarkably narrow, at only 8.6mm wide, yet maintains a rugged durability due to its high-quality construction. This provides the eyecatching look of neon in a slim package that is easy to work with and can fit where other neon can't. With up to 5-meter run lengths powered from one end, UltraSlim LED Neon is UL Listed and saves time and money on installation. It runs on 24 volts DC and its silicone casing provides protection and a hotspot-free appearance. UltraSlim LED Neon is incredibly flexible, with a 25mm minimum lateral bending radius. It is low maintenance and easy to control with any of our LED controllers and DMX.

- Ultra-Slim 9.5mm profile
- Incredibly flexible
- · UV resistant and low maintenance silicone housing
- IP65 rated with factory-sealed ends
- 5-meter run length when powered from one end

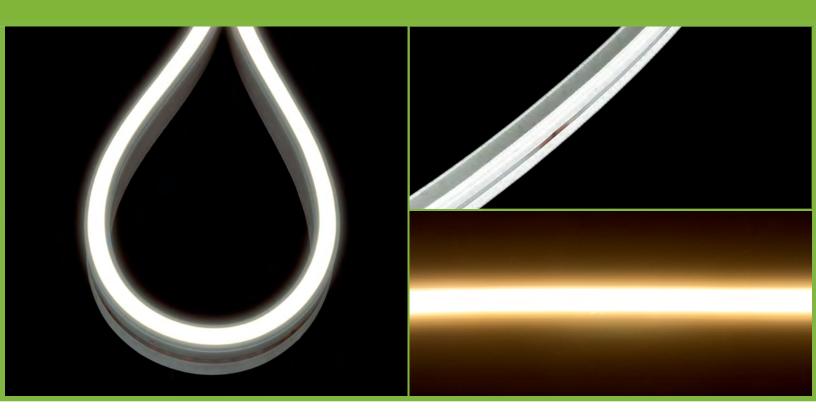





## UltraSlim LED Neon

## **Specifications**

	UltraSlim LED Neon - 2,700K	UltraSlim LED Neon - 3,000K	UltraSlim LED Neon - 4,000K	UltraSlim LED Neon - 5,000K	UltraSlim LED Neon - 6,500K
	LN-US-2700K	LN-US-3000K	LN-US-4000K	LN-US-5000K	LN-US-6500K
Beam Angle	120	120	120	120	120
Brightness (lm/m)	200	190	210	210	210
Efficacy (lm/W)	20.8	19.8	21.9	21.9	21.9
Brightness 2(mW/m)	730	730	800	800	800
Color Rendering Index	90+	90+	90+	90+	90+
Color Temperature	2,700	3,000	4,000	5,000	6,500
Electrical					
Voltage (DC)	24	24	24	24	24
Power (W/m)	9.60	9.60	9.60	9.60	9.60
Density (LEDs/m)	120	120	120	120	120
LED Node Size	2835	2835	2835	2835	2835
Dimming Specifications	Fully dimmable				
Physical					
Material	Silicone	Silicone	Silicone	Silicone	Silicone
Width (mm)	8.6	8.6	8.6	8.6	8.6
Height (mm)	14	14	14	14	14
Cutting Increment (mm)	50	50	50	50	50
Rating	UL, RoHS				
IP Rating	IP65	IP65	IP65	IP65	IP65
Warranty	3 years limited				