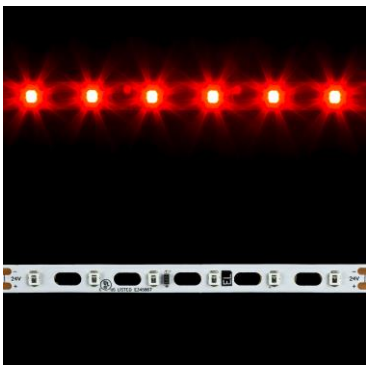
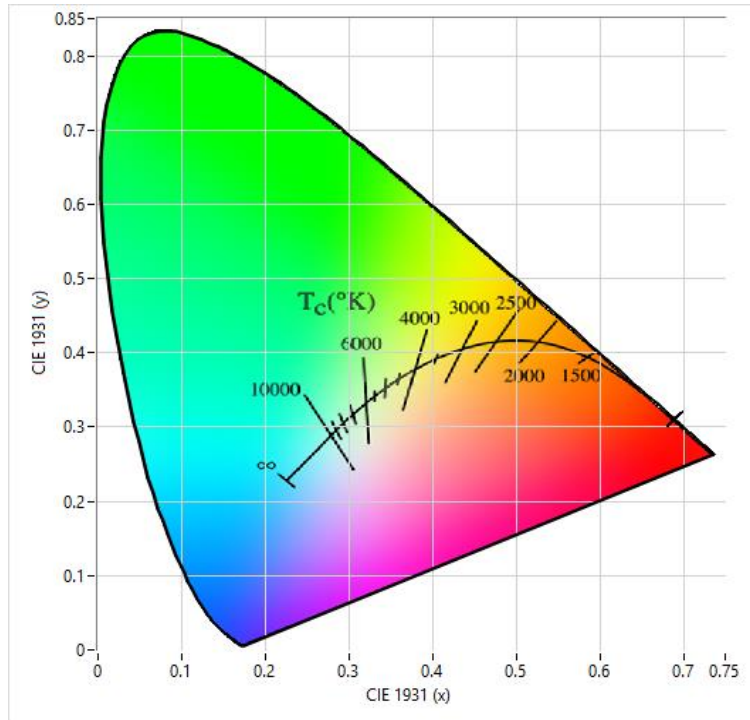

Integrating Sphere Test Report

HyperFlex 2835 LED Strip Light - Red - 60/m - CurrentControl - 10m Reel
Red-CC2835HF-60-8-10m



Red-CC2835HF-60-8-10m

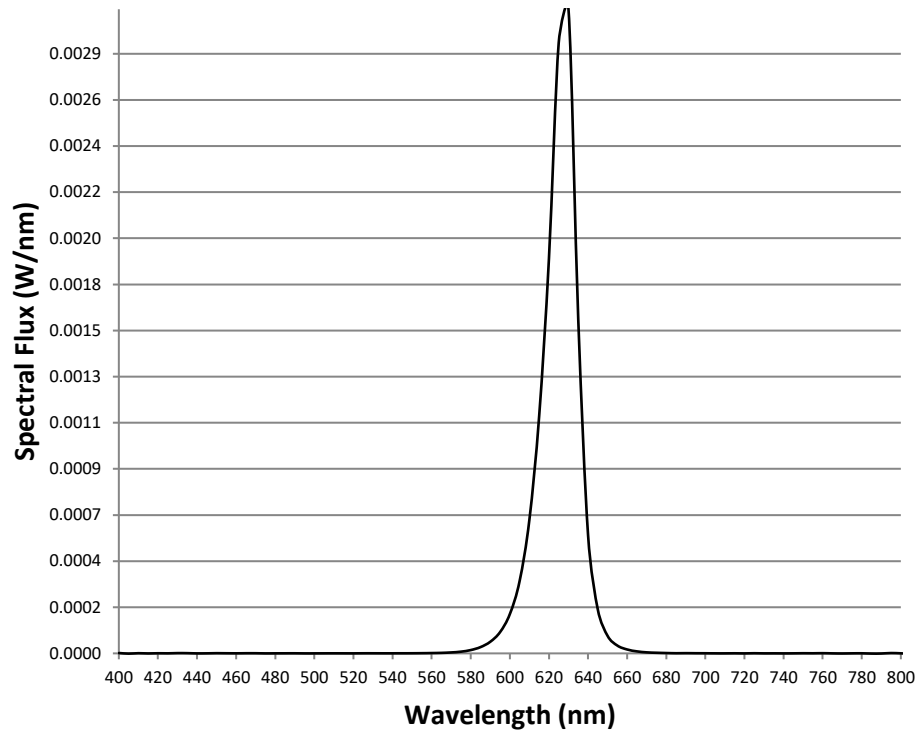


Photometric Test Results

Total Radiant Flux* (W): 0.064672
Total Luminous Flux* (lm): 14.5331
CIE 1931 Tristimulus x: 0.689605
CIE 1931 Tristimulus y: 0.309568
CIE 1931 Tristimulus Y: 0.021289
CIE 1976 Chroma u': 0.516983
CIE 1976 Chroma v': 0.522174

*Total radiant and luminous flux are per test length, listed on page 2, not characteristic of the entire reel.

Spectral Power Distribution



Spectral Response Characteristics

Peak Wavelength (nm): 628.18
Center Wavelength (nm): 626.75
Full Width (nm): 15.68
Centroid Wavelength (nm): 625
Dominant Wavelength (nm): 619
Purity: 99.79922
Voltage (V): 24

Date of Test: 12/5/18
Length of Test Sample: 100mm
Measurement Geometry: 2pi

Environmental Lights
888-880-1800