



MODELS 60 & 64

UNDERGROUND™
WIRE-NUT®
 WIRE CONNECTORS

FEATURES/BENEFITS:



- EASY TO APPLY, PRE-FILLED TWIST-ON WIRE CONNECTORS
- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE AND CORROSION
- SPECIFICALLY DESIGNED FOR USE IN VARIOUS WET LOCATION ELECTRICAL CONNECTIONS INCLUDING DIRECT-BURIAL APPLICATIONS

ELECTRICAL:

VOLTAGE: MODEL 60 600 V MAX*
 MODEL 64 600 V MAX
 *SIGNS/LUMINARES 1000V

PHYSICAL:

HOUSING: THERMOPLASTIC POLYESTER
 INSERT: STEEL
 PLATING: ZINC
 TEMPERATURE: 105 C (221 F)

STANDARDS & SPECIFICATIONS:


UL 486C
 UL 486D FOR DIRECT BURIAL
 UL 94V-2 FLAME RATING
 CSA- C22.2 NO. 188
 CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL
 RoHS COMPLAINT

WIRE RANGE:

- Solid and/or stranded wire combinations unless stated otherwise
- Consult factory for other combinations not listed

MODEL 60	MODEL 64
STRIP LENGTH: 1/2" (12,7mm)	STRIP LENGTH: 5/8" (15,9mm)
1 to 2 #10 1 to 3 #12 1 to 4 #14 2 #16 2 #18	1 to 3 #10 1 to 3 #12 2 to 5 #14 2 to 4 #16 2 to 4 #18 solid 3 or 4 #20 solid 3 or 4 #22 solid

DIMENSIONS:

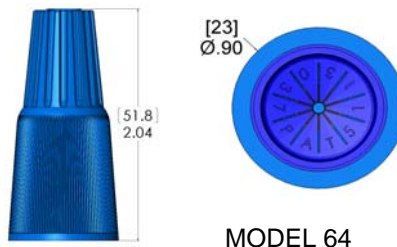

MODEL 64

ORDERING INFO:

CATALOG #	MODEL	COLOR	PACKAGE TYPE:	WEIGHT LBS (KG):
30-360	60	Blue/Blue	Box of 1,000	14.4 (6.5)
30-364	64	Blue/Dk. Blue	Box of 1,000	34.1 (15.5)

FACTORY CONTACT:

ENGINEERED SOLUTIONS
 IDEAL INDUSTRIES, INC.
 BECKER PLACE SYCAMORE IL
 USA 60178
 P: 1-800-324-9571
 F: 1-888-222-6140
 E: oem@idealindustries.com

SALES CONTACT: