



Integrating Sphere Test Report

Daylight White 2216 CRI 95+ LED Strip Light, 240/m, 10mm wide, by the 5m Reel
dl2216-240-10-reel

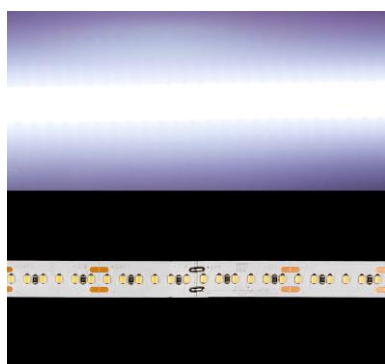

dl2216-240-10-reel

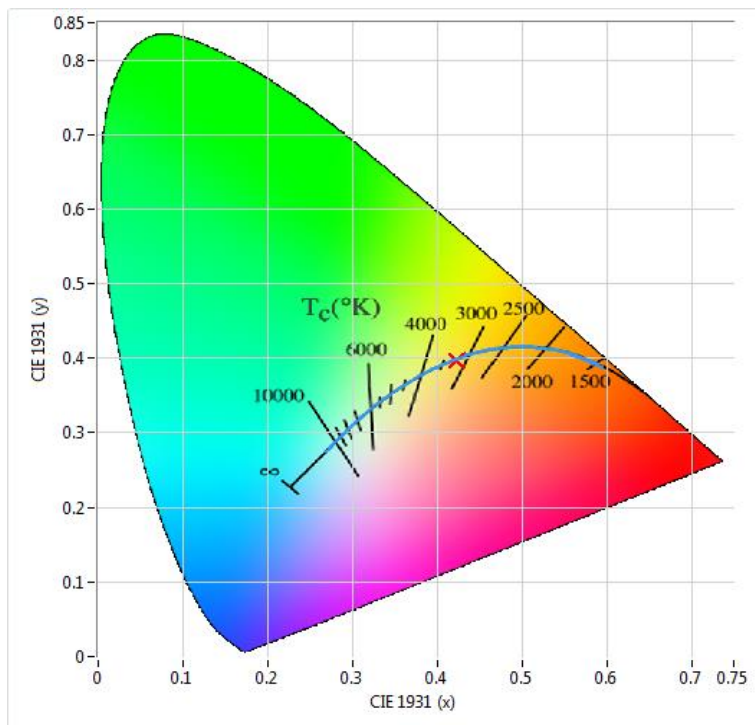


Photometric Test Results

Total Radiant Flux* (W): 0.646352	R1: 97.97148
Total Luminous Flux* (lm): 161.3296	R2: 98.32
	R3: 95.93834
CIE 1931 Tristimulus x: 0.310893	R4: 94.36444
CIE 1931 Tristimulus y: 0.319627	R5: 98.55059
CIE 1931 Tristimulus Y: 0.236204	R6: 95.21352
	R7: 96.03344
CIE 1976 Chroma u': 0.200132	R8: 95.53547
CIE 1976 Chroma v': 0.462949	R9: 89.96636
	R10: 97.15067
Color Temperature (CCT K): 6688	R11: 92.07219
Duv: -0.00075	R12: 85.83056
CQS: 96.35	R13: 98.74987
CRI: 96.49	R14: 98.08974

*Total radiant and luminous flux are per test length, listed on page 2, not characteristic of the entire reel.

888-880-1880

Spectral Power Distribution

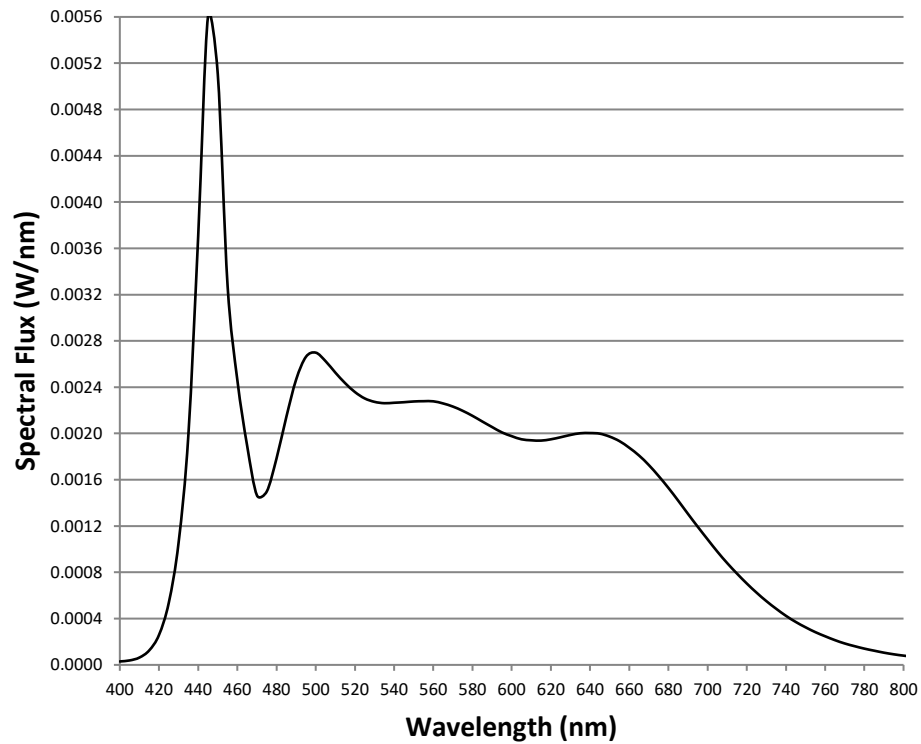

Spectral Response Characteristics

Peak Wavelength (nm): 446.65
Center Wavelength (nm): 447.18
Full Width (nm): 17.69
Centroid Wavelength (nm): 563.17
Voltage (V): 24

Date of Test: 10/26/18
Length of Test Sample: 125mm
Measurement Geometry: 2pi

Environmental Lights

888-880-1800

